NEUTRON SOURCES

- Types of Sources
- U.S. Sources Available for Users
- Plans for the Future
- The Neutron Scattering Society of America (NSSA)

Jim Rhyne
Lujan Neutron Scattering Center
Los Alamos National Lab.

What do we need to do neutron scattering?

- **Neutron Source – produces neutrons**
- **Diffractometer or Spectrometer**
  - Allows neutrons to interact with sample
  - Sorts out discrete wavelengths by monochromator (reactor) or by time of flight (pulse source)
  - Detectors pick up neutrons scattered from sample
- **Analysis methods to determine material properties**
- **Brain power to interpret results**

Sources of neutrons for scattering

- **Nuclear Reactor**
  - Neutrons produced from fission of ^{235}U
  - Fission spectrum neutrons moderated to thermal energies (e.g. with D_20)
  - Continuous source – no time structure
  - Common neutron energies -- 3.5 meV < E < 200 meV

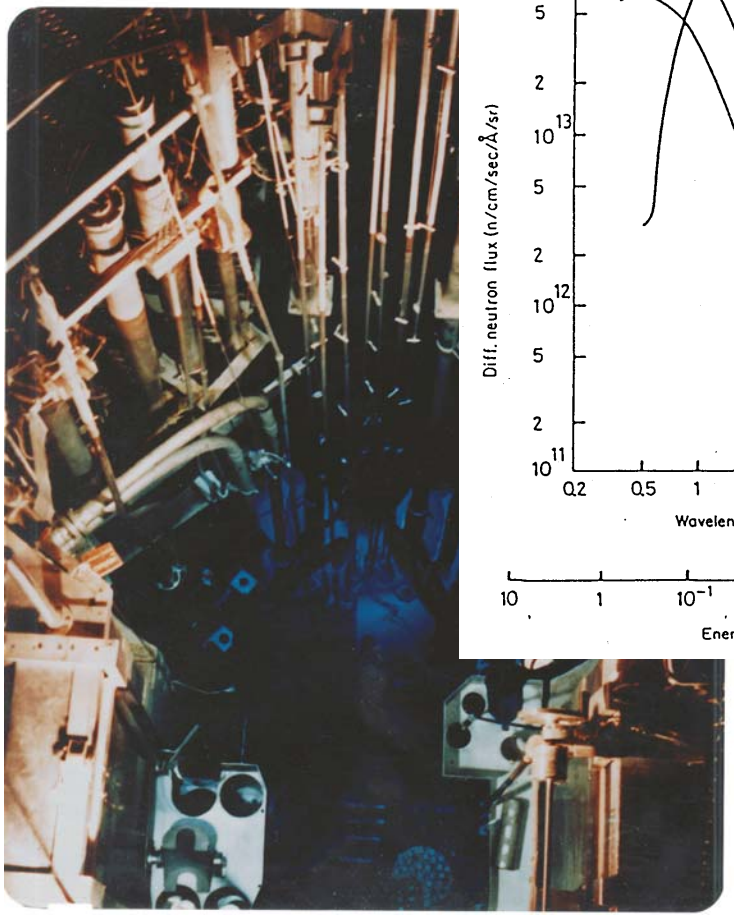

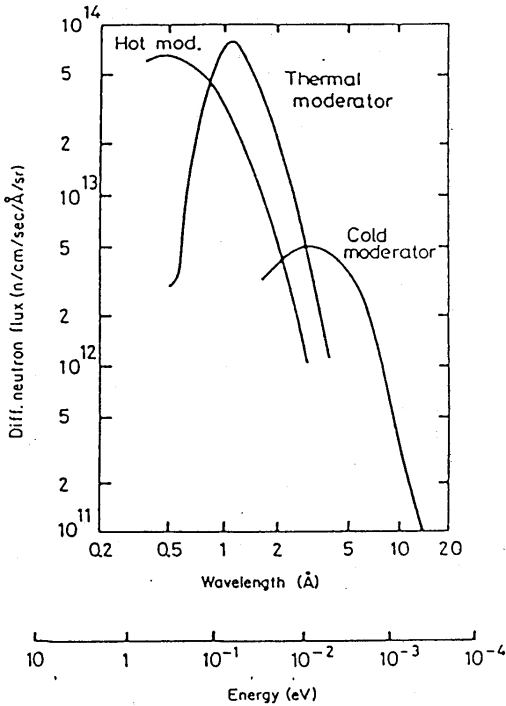

Pulse sources – time structure and wide energy spectrum

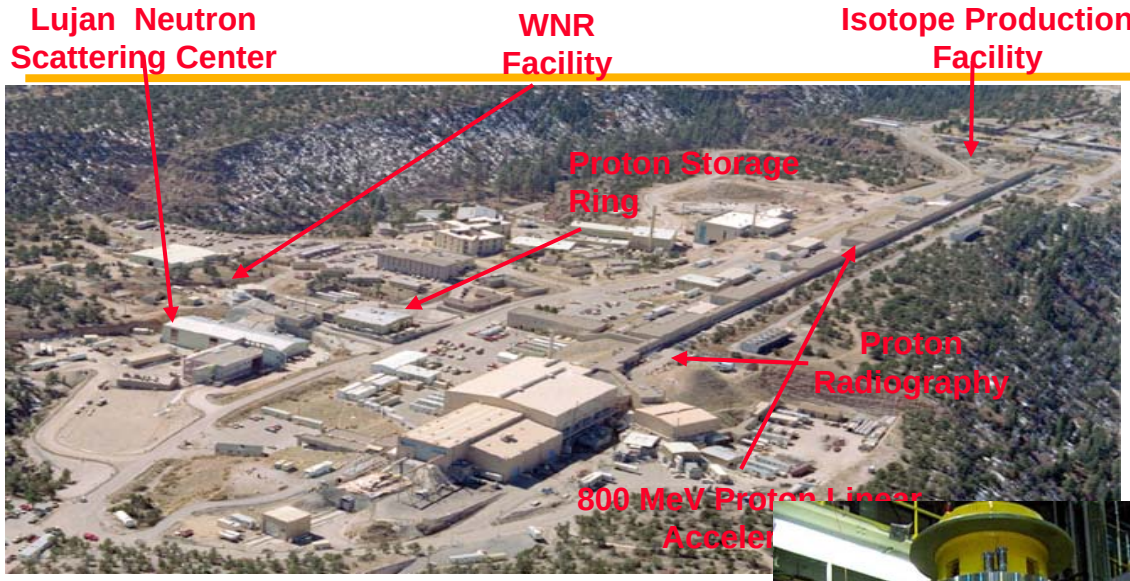

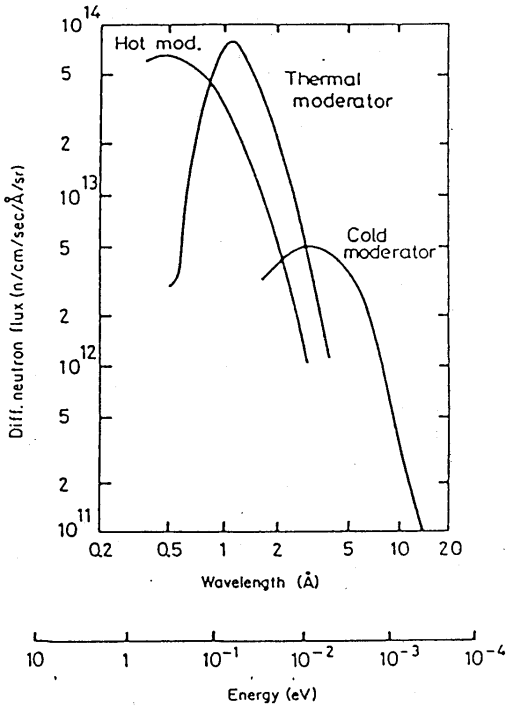

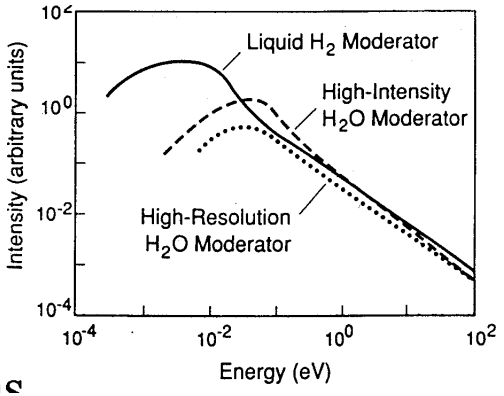

- **Proton accelerator and heavy metal target (e.g., W or U)**
  - Neutrons produced by spallation
  - Higher energy neutrons moderated to thermal energies
  - Neutrons come in pulses (e.g. 20 Hz at LANSCE)
  - Wider range of incident neutron energies

Neutron scattering machines

- **Spectrometers or diffractometers**
  - typically live in a beam room or guide hall
  - are heavily shielded to keep background low and protect us
  - Receive the neutrons from the target (or reactor)
  - Correlate data with specific neutron wavelengths by time of flight
  - Accommodate sample environments (high/low temperature, magnetic fields, pressure apparatus)

User instruments span general purpose and specialized categories

- **Diffraction instruments**
  - Atomic and magnetic structures – polycrystalline and single crystal form
- **Inelastic instruments**
  - Dispersive and non-dispersive excitations
  - Magnetic modes (magnons or crystal field excitations)
  - Phonon modes and density of states
- **Special purpose instruments**
  - Neutron reflectivity (depth profile of order parameters)
  - Small angle scattering (bridge between atomic and macro-dimensional structures)
  - Neutron applications to engineering problems
- **Sample environments enable science**

Sample environments – key to modern experiments

- **Extremes of temperature**
  - Low (cryostats)
    - » conventional closed cycle refrigerators [Joule expansion cycles] (4K and up)
    - » He cryostats (1.2 K [pumped] and up)
    - » He^3-He^4 dilution refrigerators (20 mK and up)
  - High (furnaces)
    - » Conventional (up to 1200 C)
    - » Special purpose (up to 3000 C)
- **Magnetic fields on samples**
  - Fe-core magnets (up to about 3T)
  - Superconducting magnets (typical – 9T; special [finicky] – 18T)
- **High Pressure**
  - Fluid cells (He or liquid) [up to 1.4 GPA (14 kbar)
  - Anvil presses (up to 40 GPa)
- **Other specialized environments – sheer cells, Langmuir troughs, etc.**

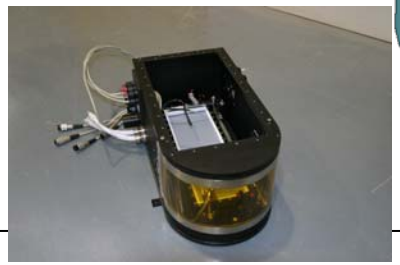

National User Facilities

Have sample, will travel

Where do I go to get neutrons?

There are five four National User Facilities for neutron scattering in the US

National User Facilities
HFIR 1966
NCNR 1969
IPNS 1981-2008
Lujan 1985
SNS 2006

Local/Regional Facilities (University Reactors)
MIT
Missouri
…

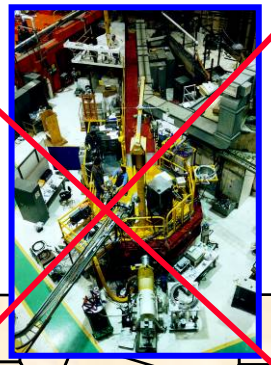

Intense Pulsed Neutron Source (7 kw)

NIST Center for Neutron Research

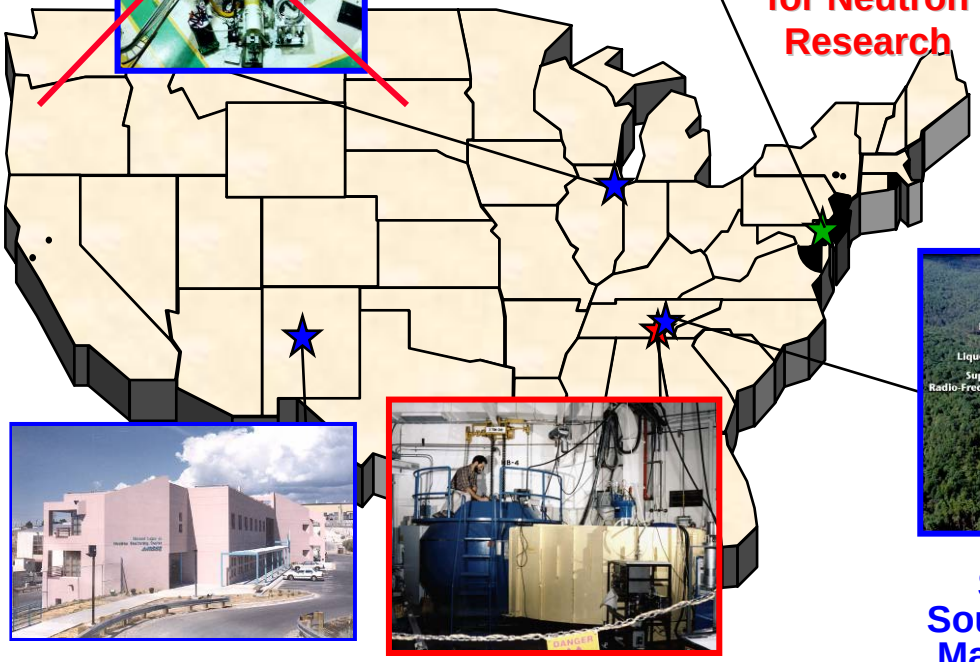

Manuel Lujan Jr. Neutron Scattering Center (100 kW)

High-Flux Isotope Reactor

Spallation Neutron Source (first neutrons in May 2006 -- operational instruments in 2007) (1400 kW)

US Neutron Source Support

- DOE operates 3 out of 4 of the Major Neutron Sources (and supports fuel for university reactors)
- DOC/NIST operates the only fully internationally competitive neutron facility (NCNR) with the largest user base (cold neutrons)
- NSF, NIH, and DOD support current neutron beam research mostly by supporting university research
  - EXCEPTIONS: NSF funds the Center for High Resolution Neutron Scattering (CHRNS) at NIST, and has supported some construction of instruments at LANSCE, HFIR, IPNS and MURR) and may fund an instrument suite at the SNS. NIH has funded a reflectometer at NCNR.

World View of Neutron Scattering Facilities

Facility	Start Operation	Cease Operation	Country	Type	Time structure	Peak Flux x 10-14	Power	Instruments Total	Diffraction	Low Q	Inelastic
NRU	1957	2005	Canada	Reactor	Continuous	3	120MW	5	2	1	2
R-2	1960		Sweden	Reactor	Continuous	1	50MW	6	5	0	1
IBR-2	1961		Russia	Reactor	Pulsed		2MW	13	5	4	4
FRJ-2	1962	2006	Germany	Reactor	Continuous	2	23MW	15	5	5	5
DR3	1963	2000	Denmark	Reactor	Continuous	1.5	10MW	7	2	3	2
HFBR	1965	1999	US	Reactor	Continuous	4	30MW	13	7	2	4
HFIR	1966		US	Reactor	Continuous	12	85MW	10	3.7	3	3.3
NCNR	1969		US	Reactor	Continuous	2	20MW	17	2	6	9
ILL	1972		France	Reactor	Continuous	12	58MW	34	15	4	15
BER-2	1973		Germany	Reactor	Continuous	2	10MW	15	10	2	3
Orphee	1980		France	Reactor	Continuous	3	14MW	25	12	6	7
KENS	1980		Japan	Spallation	Pulsed	3	3kW	15	5	4	6
IPNS	1981		US	Spallation	Pulsed	5	7kW	12	5	4	3
ISIS	1985		England	Spallation	Pulsed	20-100	160kW	19	9	3	7
LANSCE	1988		US	Spallation	Pulsed	30	56kW	7	3	2	2
JRR-3M	1990		Japan	Reactor	Continuous	2	20MW	23	7	5	11
SINQ	1996		Switzerland	Spallation	Continuous	2	1MW	10	5	2	3
Under development											
FRM-II	2002		Germany	Reactor	Continuous	7	20MW	17			
RR	2005		Australia	Reactor	Continuous	4	20MW	18			
SNS	2006		US	Spallation	Pulsed	200	2MW	24			
JSNS	2006		Japan	Spallation	Pulsed	100	1MW	24			
ESS†	2010		Europe	Spallation	Pulsed	2000	5MW	40			

The number of neutron scattering instruments available in the U.S. now and in the future will be less than half that available in Western Europe and less than available in Japan. On a per capita basis the United States has half the neutron scattering capacity of either Western Europe or Japan – and this shortfall is unlikely to change for the forseeable future

---- Ref. ***Report on the Status and Needs of Major Neutron Scattering Facilities and Instruments in the United States,*** June 2002

Center for Neutron Research

NIST Center for Neutron Research (NCNR)

A Comprehensive Neutron User Facility

- 20 MW Heavy-Water-Moderated REACTOR
- A Cold Neutron Source and Guide Hall
- Current Total -- 17 Thermal and Cold Neutron Instruments
- Developing 2nd guide hall – Amer. Compet. Init.

Center for Neutron Research

Reactor Hall Instruments

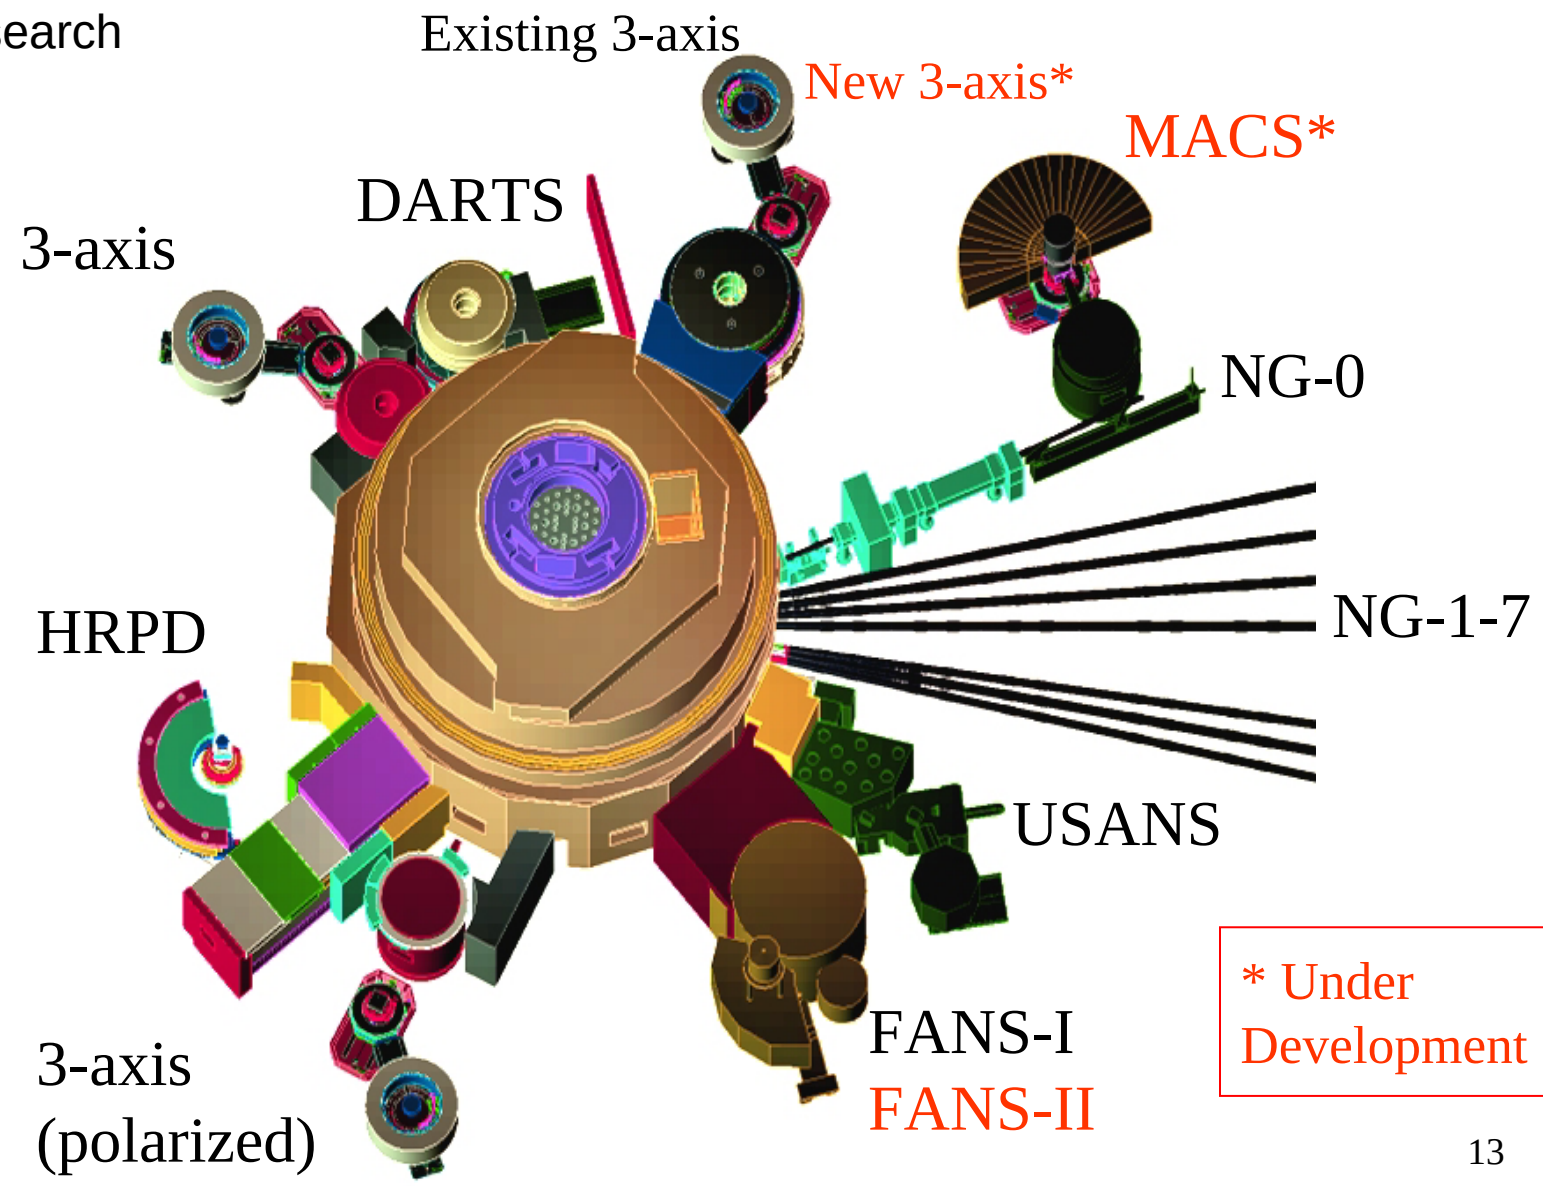

* Under Development

NCNR Guide Hall Instruments

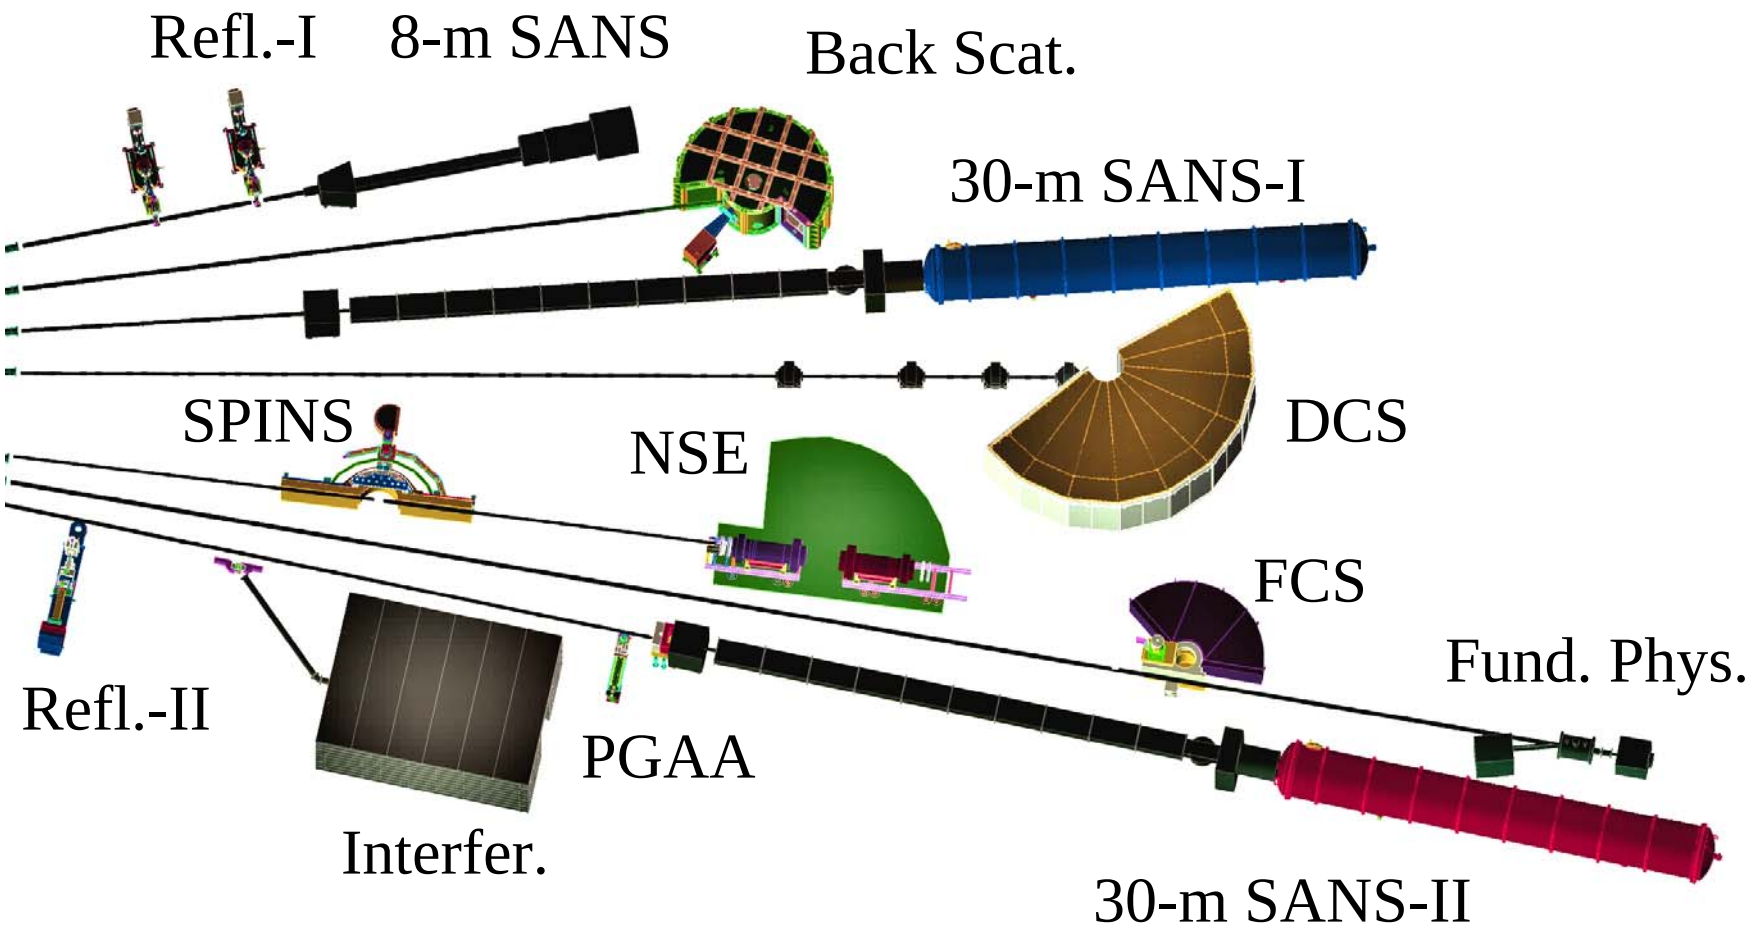

10 Cold-Neutron Scattering Instruments

New Guide Hall Initiative
5 additional instruments

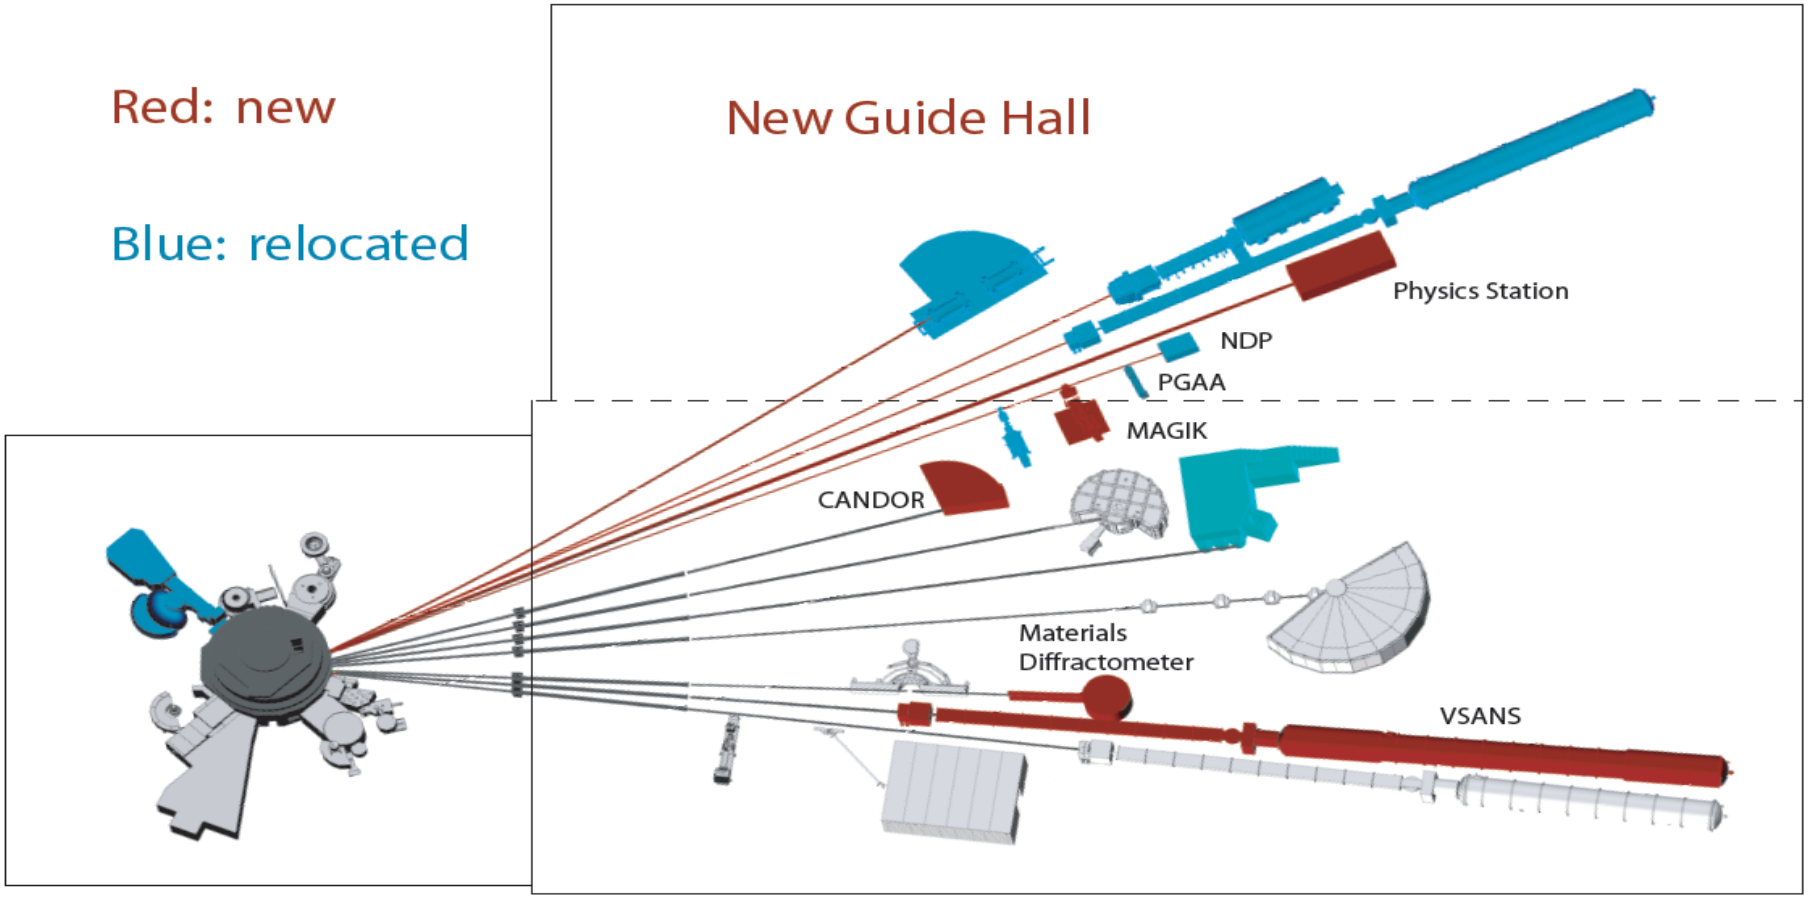

The NCNR Advanced Cold Neutron Source

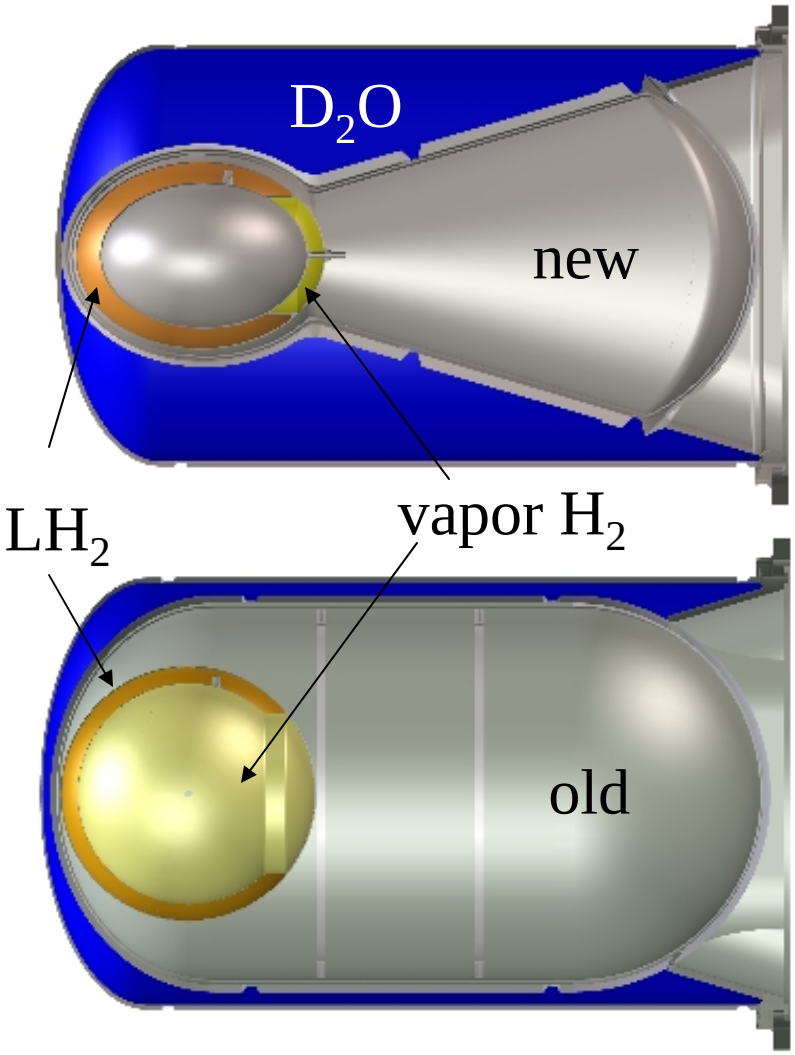

New source: additional D_2O acts as a neutron reflector. LH_2 thicker near source. Inner ellipsoid evacuated.

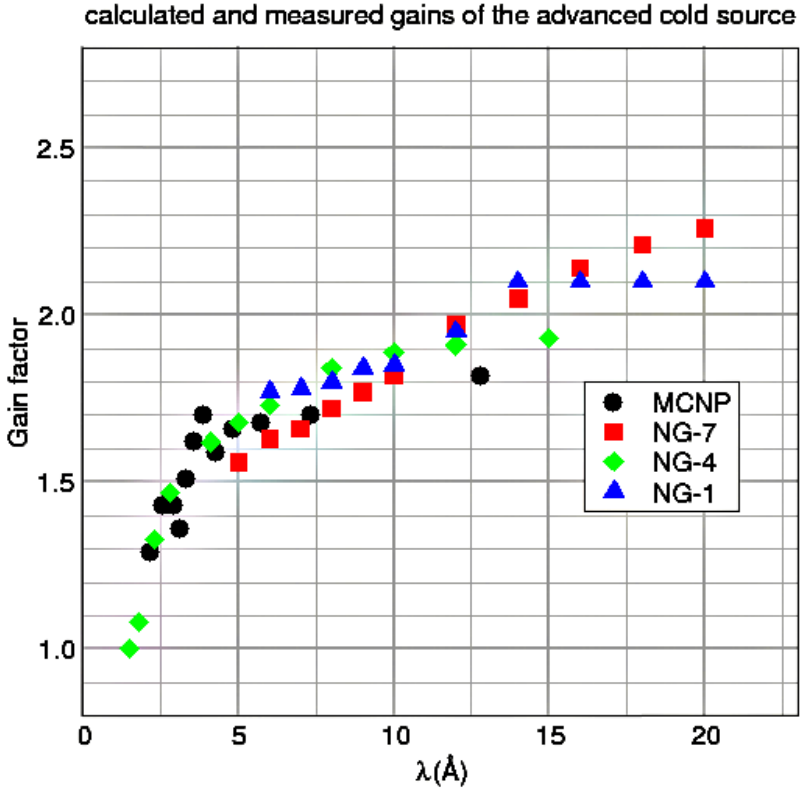

Overall gain: 40 % at 2.4 Å to slightly more than 100 % for $\lambda > 15$ Å. Excellent agreement with MCNP.

High Flux Isotope Reactor

- Oak Ridge, Tennessee
- BES, Department of Energy
- Started Operation:1966
- 85 MW Light Water Reactor
- Peak Core Neutron Flux
  - 12×10^{14} /cm^{2}s

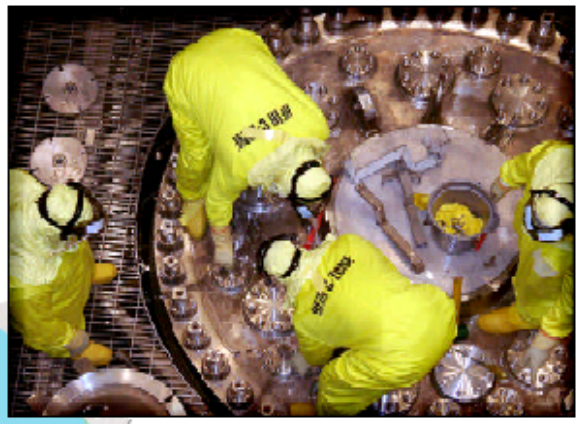

The reactor was disassembled and the beryllium reflector replaced.

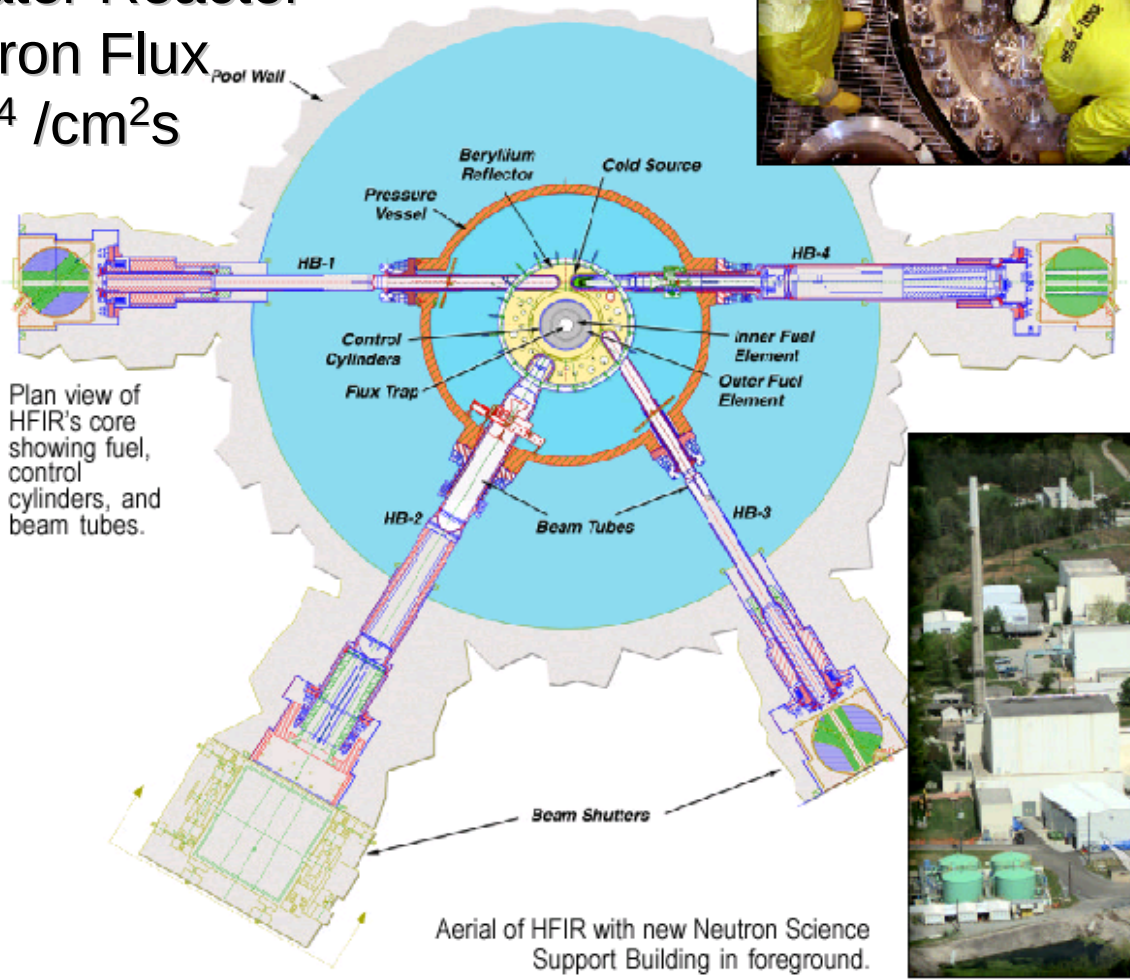

Plan view of HFIR's core showing fuel, control cylinders, and beam tubes.

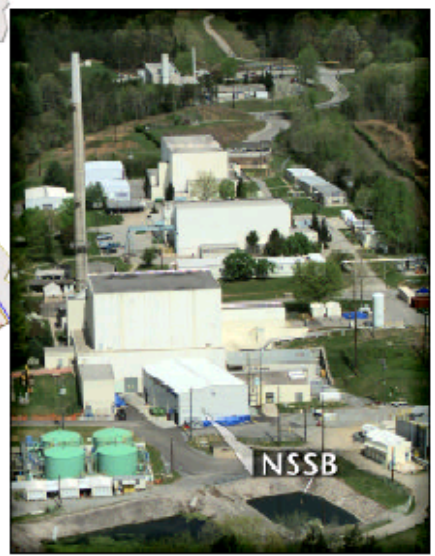

Aerial of HFIR with new Neutron Science Support Building in foreground.

High Flux Isotope Reactor at Oak Ridge National Laboratory

The United States' highest flux reactor-based source of neutrons for condensed matter research

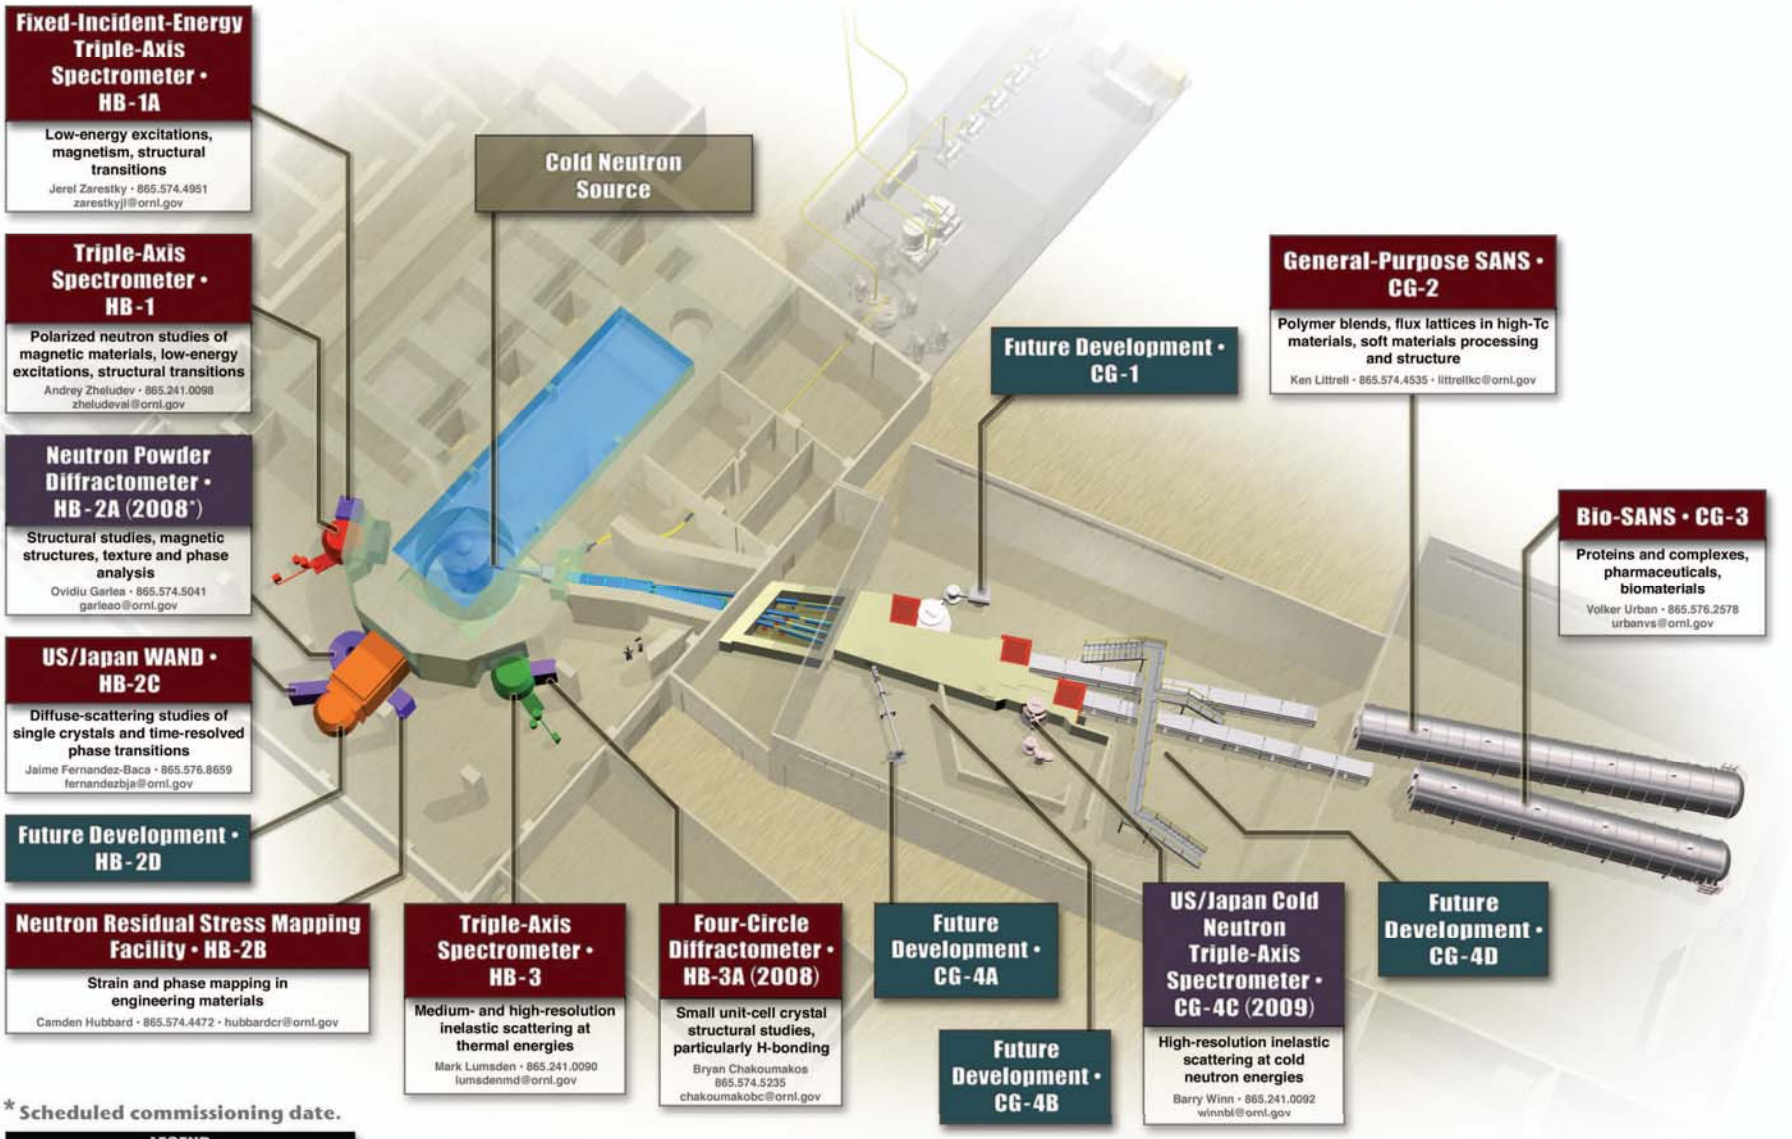

* Scheduled commissioning date.

LEGEND

- Installed, commissioning, or operating
- In design or construction
- Under consideration

07-G00244E/arm

OAK RIDGE National Laboratory

NEUTRONS.ORNL.GOV

NEUTRON SCIENCES

HFIR Neutron Scattering Upgrade

- Beam tubes enlarged to 6”
  - New monochromator dums
  - Focussing optics
- Cluster of 4 instruments at HB-2
  - Powder diffractometer
  - Triple axis spectrometer
  - Wide angle diffractometer
  - Residual stress spectrometer
- High-brightness cold source installed at HB-4 (guide hall)
  - 2 SANS (40m, 35m; flux gain x 100)
  - Cold triple axis spectrometer

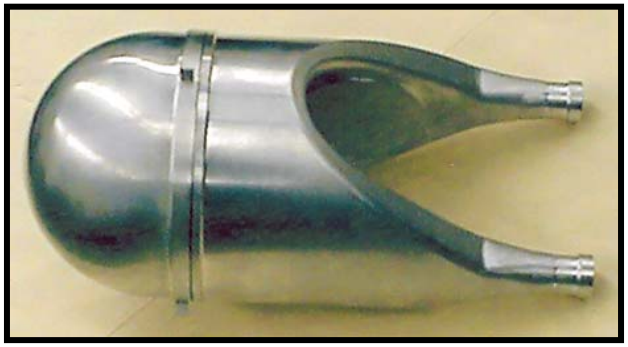

- Schedule
  - Rx restarted May 2007 following cold source installation
  - Cold guide hall instruments – currently being completed

User Facilities at LANSCE: Los Alamos Neutron Science Center

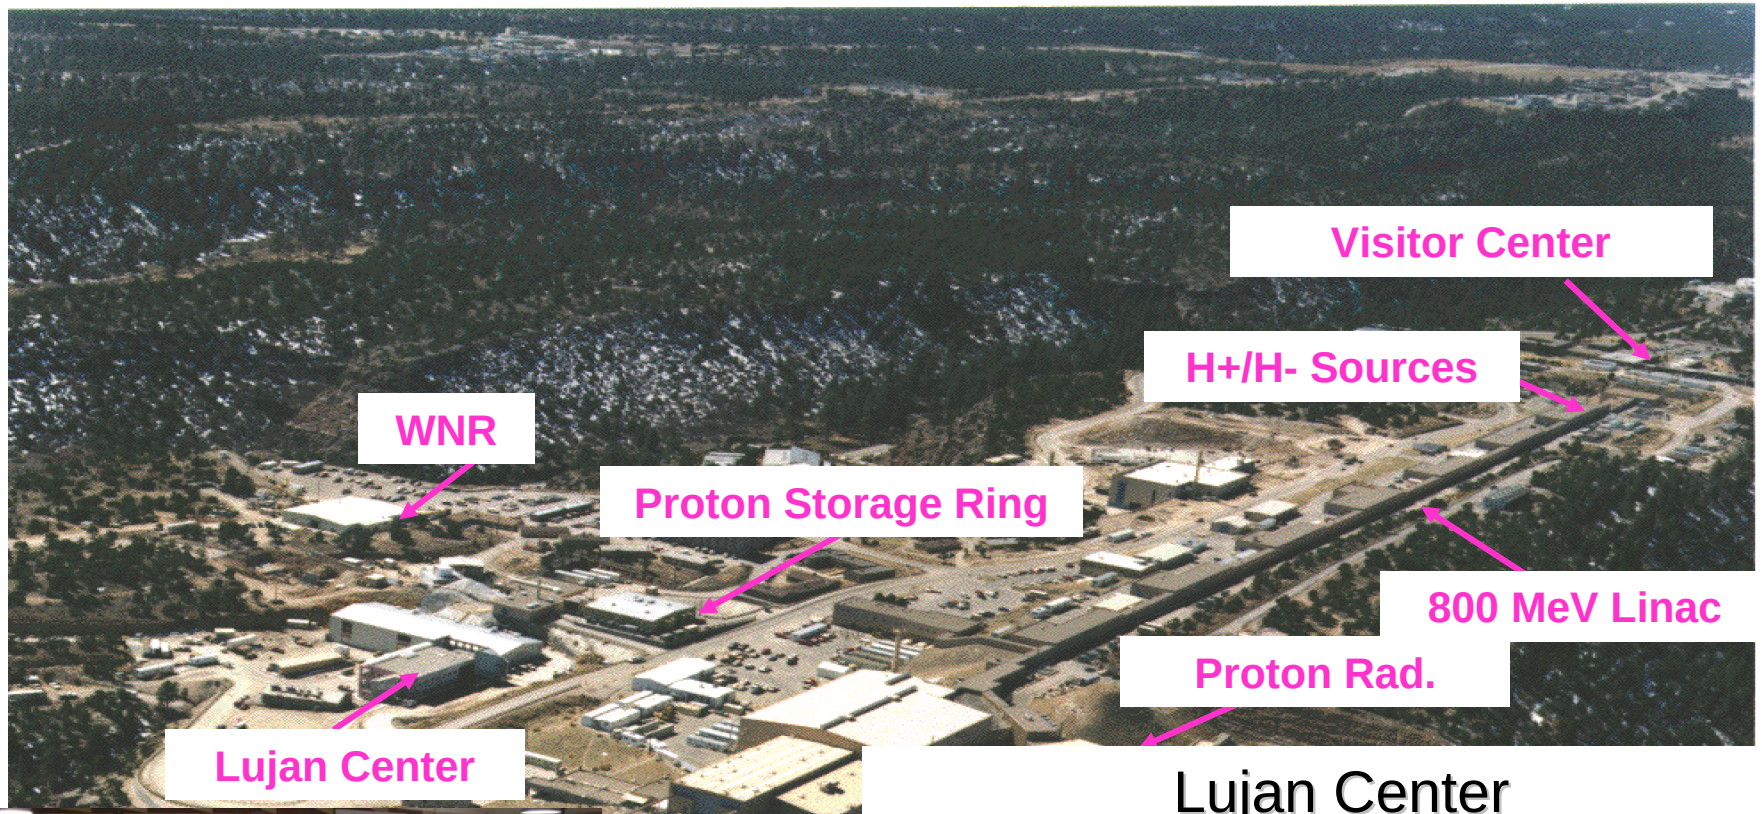

Lujan Center

- BES/NNSA, Department of Energy
- Started Operation:1985
- 85 kW Spallation Source (LANSCE)
- Peak Flux – 30 x 10^{14} /cm^2s
- Cold Source
- 11 Instruments

Lujan has has 17 flight paths, 11 of which have neutron scattering instruments

Moderators (FPs)

H_2O decoupled high resolution (1,2,16)

H_2O decoupled high intensity (3-8)

liq-H_2 partially coupled (9-11)

liq-H_2 coupled (12-13)

H_2O coupled (14-15)

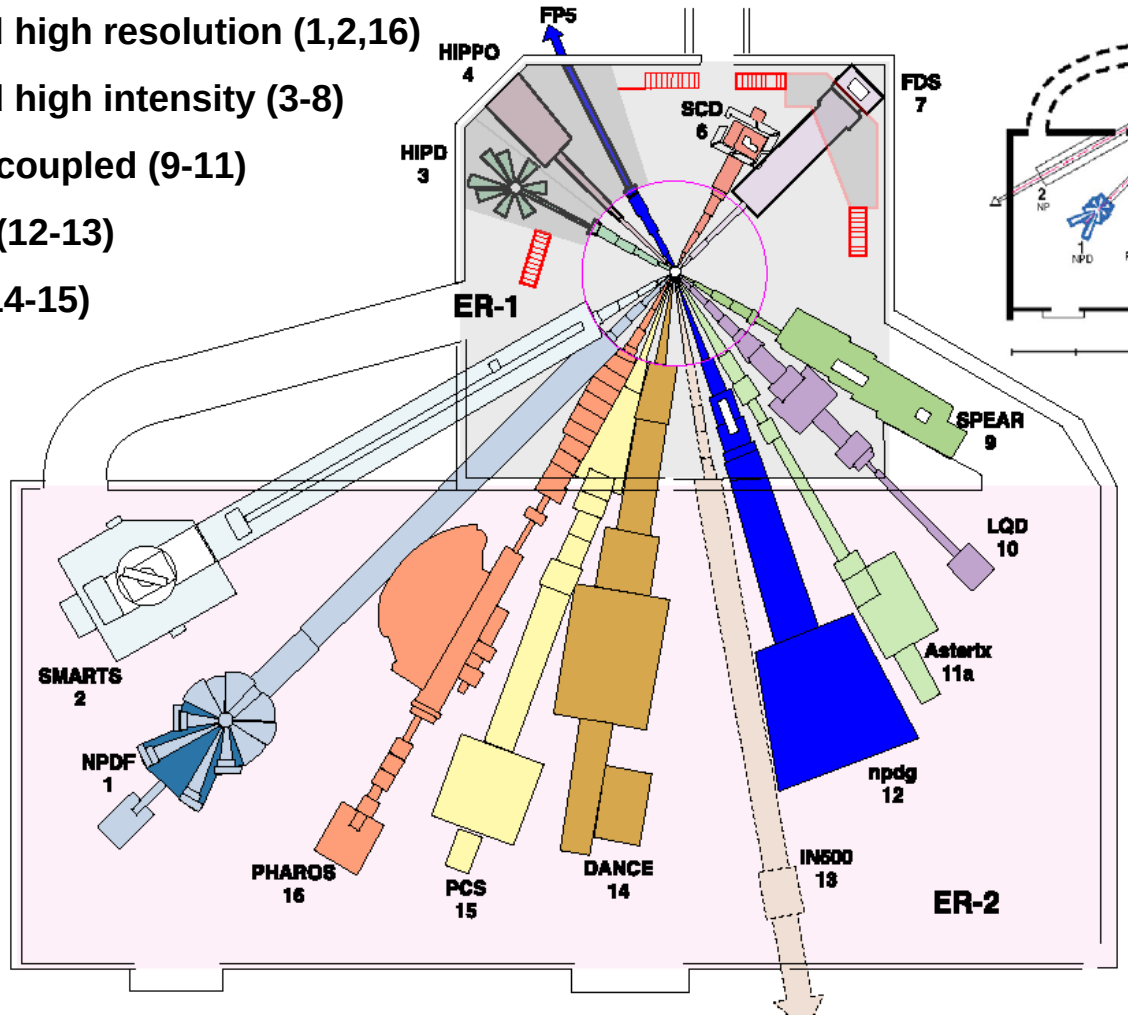

2004

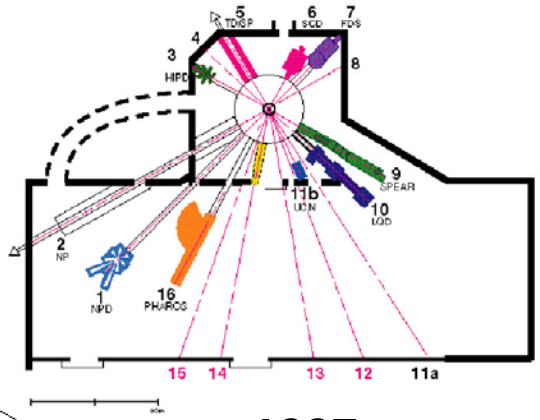

1997

Rapid growth in number and versatility of instruments has occurred in the last decade

Instruments by functional categories

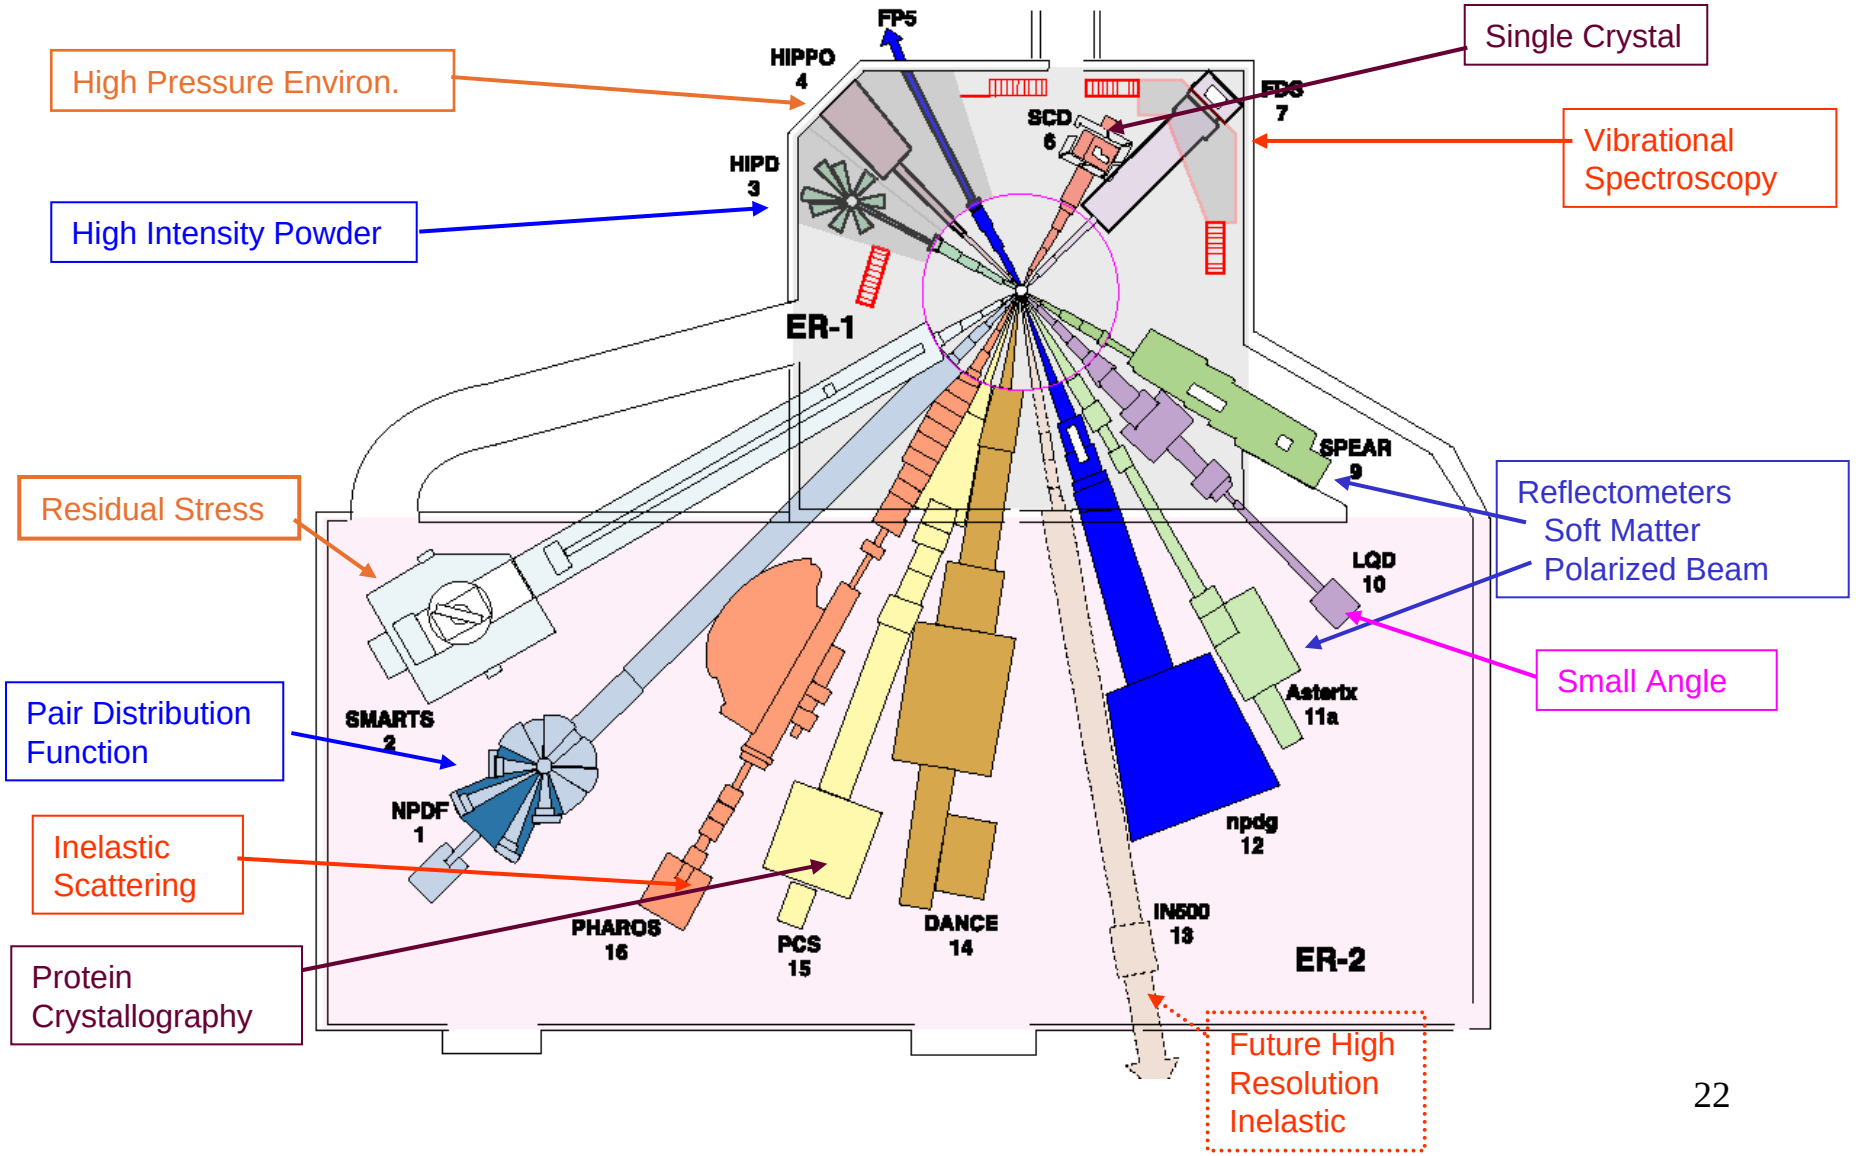

NRU Reactor – Chalk River, CA

- 125 MW heavy water reactor – Large Core, peak thermal flux of $3x10^{14}$, initial operation in 1957
- Seven beam tubes dedicated to neutron instruments
  - DualSpec
    - C2, High Resolution Powder Diffractometer
    - C5, Polarized Beam Triple-Axis Spectrometer /Reflectometer
  - D3 – Reflectometer
  - E3 – Materials Science Diffractometer
  - L3 – Strain-Scanning Spectrometer
  - N5 – Triple-axis Spectrometer
  - T3 – Bioscience Diffractometer

- Neutron Scattering Program Funded/Operated by National Research Council of Canada

SPALLATION NEUTRON SOURCE

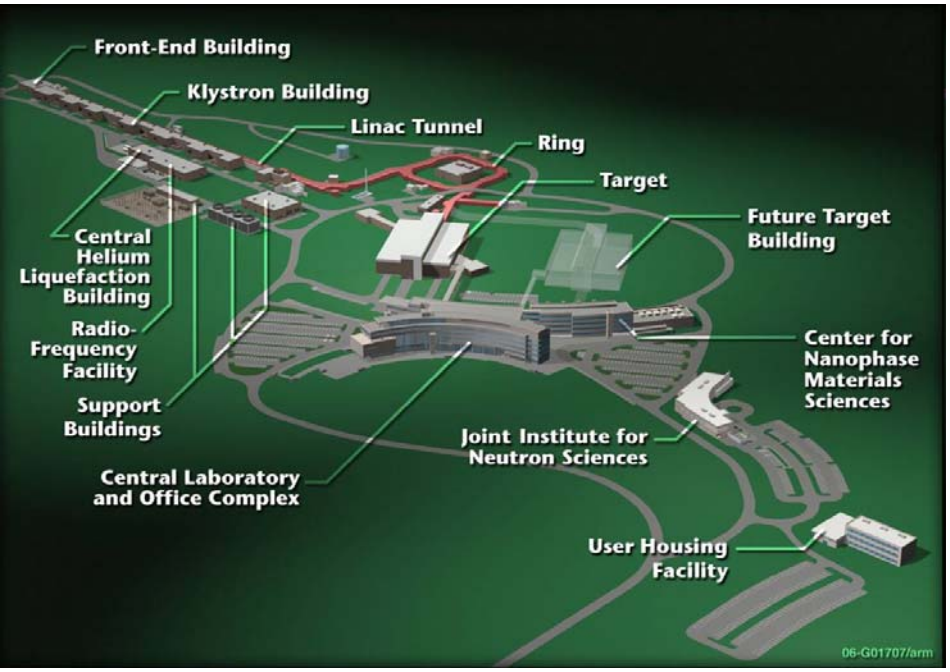

- First neutron production ~~scheduled for~~ June 2006
  April 28, 2006
  2:04 p.m.
- Started with 3 (soon to be 10) instruments
- Capacity for a total of 24 instruments
- Accommodate 2000 users/year at full operation

Procedure for Obtaining Time on Spectrometers

- Make contact with and discuss proposed experiments with instrument scientist at facility
- Go to facility web site and access proposal form – complete by deadline (caution: usually only 2 per year!)
- Approval (declination) received within about 6 weeks
- Fine tune schedule with instrument scientist (if necessary)
- Complete radiation training module and access approvals in advance of visit (each lab has different procedures).
- If using ancillary equipment, make sure sample dimensions are correct, etc.
- Arrange travel and housing for visit (partial travel assistance may be available for fist-time visitors or students.)
- Arrive at facility in advance of allocated time to set up experiment
- Apply for more time for next series of experiments (max. about 2 – 3 visits/year)

Reports

- *Neutron Source Upgrades and Specifications for SNS* (1996)
  - Research Reactor Upgrades, Robert Birgeneau, Chair
  - Spallation Neutron Source Upgrades, Gabriel Aeppli, Chair
  - Technical Specifications for the Next Generation Spallation Source, Thomas Russell, Chair
- *Review of the High Flux Isotope Reactor Upgrade and User Program* (October, 1998; Jack Crow, Chair)
- *Neutron Scattering* (February, 2000; Martin Blume, Chair) http://www.sc.doe.gov/production/bes/BESAC/neutronrpt.pdf
- *Review of IPNS/LANSCE* (March, 2001; Ward Plummer, Chair)
- ***Report on the Status and Needs of Major Neutron Scattering Facilities and Instruments in the United States*** (June 2002; Patrick Gallagher, Chair) http://www.ostp.gov/html/NeutronIWGReport.pdf

Information on North American National Neutron Scattering Facilities

- ***Neutron Scattering Society of America (NSSA)*** [on-line or mail-in membership form]
  - http://www.neutronscattering.org
  - Announcements of meetings, workshops, etc.
  - Links to major neutron facilities
- ***Oak Ridge Spallation Neutron Source (SNS) and High Flux Isotope Reactor (HFIR)***
  - http://neutrons.ornl.gov/
- ***NIST Center for Neutron Research (NCNR)***
  - http://www.ncnr.nist.gov/
- ***Los Alamos Lujan Neutron Scattering Center (LANSCE)***
  - **http://lansce.lanl.gov/**
- ***NRU Chalk River***
  - ***http://neutron.nrc.ca/intro.html***