Canopies: plastic, white.
Cable entry, cable clamp, terminal block (excluding pendant tube).
Ceiling fixture: cast aluminum/metal, white powder-coated.
Mounting components: metal.

Type SKA
Desc: 12 567.023
12 572.000

	79 944.023	12 446.023	12 582.023	12 563.023	12 558.023
Feeding possible					
Suspension at connector:	with mounting bush 12 567.000	with mounting bush 12 567.000	with mounting bush 12 567.000	with mounting bush 12 657.000	with mounting bush 12 657.000
Suspension at profile:	with mounting bush 12 572.000	with mounting bush 12 572.000	with mounting bush 12 572.000	with mounting bush	with mounting bush
Load :	44.06 lbs/20.00 kg	44.06 lbs/20.00 kg	44.06 lbs/20.00 kg	44.06 lbs/20.00 kg	44.06 lbs/20.00 kg (with heavy load dowel)

TYPE - SKA
12567.023 12572.000

Permissible loading on ERCO Monopoll track:

L (mm)	1219	2438	3657
(ft)	4	8	12
F_c (kg)	1.77	3.54	5.31
(lbs)	3.90	7.81	11.71
f_e (mm)	1.00	4.90	15.50
(inch)	0.04	0.19	0.61
F_D = 44.09 lbs/20.00 kg			
F_1 (kg)	22	6	–
(lbs)	48.50	13.23	–
F_2 (kg)	16	6	–
(lbs)	35.27	13.23	–
F_D = 132.28 lbs/60.00 kg			
F_1 (kg)	22	6	–
(lbs)	48.50	13.23	–
F_2 (kg)	16	6	–
(lbs)	35.27	13.23	–

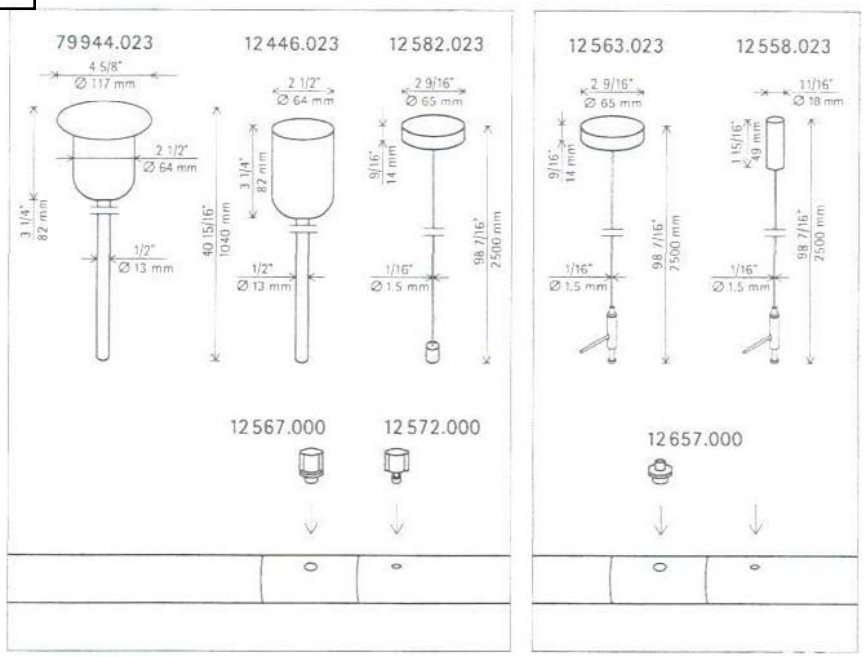



12 597.023
Wall/ceiling fixture
Mounting bush to be ordered separately
Load: 44.06 lbs / 20.00 kg



Mounting bush for 12 446.023, 12 582.023, 12 597.023:
12 567.000
For suspension of connector

12 572.000
For suspension of profile. Profile to be drilled on site

Mounting bush for 12 558.023/12 563.023:
12 657.000
For suspension of connector



The rapid connector makes levelling of suspended track simple.

12 440.000
Wire rope
Ø 1/16 inch / 1.75 mm,
L 32.8 ft / 10 m
Load: 44.06 lbs / 20.00 kg



16 910.000
Turnbuckle with 2 clamps for 12 440.000
Metal, galvanised
Load: 132.18 lbs / 60.00 kg

12 499.000
Cable nippers for shortening the copper conductors in Monopoll track



12 099.000
Hole gauge for track cut redrilling on site