

WALL UNIT-A


FREE STANDING UNIT-B

- A.** 2-1/2" (65MM) AT SINKS TO ALLOW FOR CONNECTED OVERFLOW.
- B.** 12 GA (2.6MM) S/S CLIP, 4" (100MM) LONG, FASTENED TO WALL AT EACH END OF UNIT AND 4'-0" (1200MM) O.C. SECURE TO WALL WITH A MINIMUM OF TWO. USE 1/4" (5MM) X 20 S/S BOLTS WITH TOGGLES OR EXPANSION SHIELDS.
- C.** EXPOSED ENDS TO BE FULLY WELDED CLOSED.
- D.** SEAL TO WALL ALL AROUND.


- A.** 2-1/2" X 1-1/2" (65MM X 40MM) 14 GA. (1.8MM) S/S CLIP WELDED TO SPLASH. RUN FULL LENGTH
- B.** 18 GA (1.2MM) S/S PANEL TACK WELD TO CLIPS AND SPLASH.
- C.** EXPOSED ENDS TO BE FULLY CLOSED.

NOTE: IF ACCESS TO SPLASH ON DETAIL B IS REQUIRED FOR ELECTRICAL OR PLUMBING, USE REMOVABLE PANEL AS SHOWN ON STANDARD DETAIL 1.04.1

APPROVED: 08-01-01

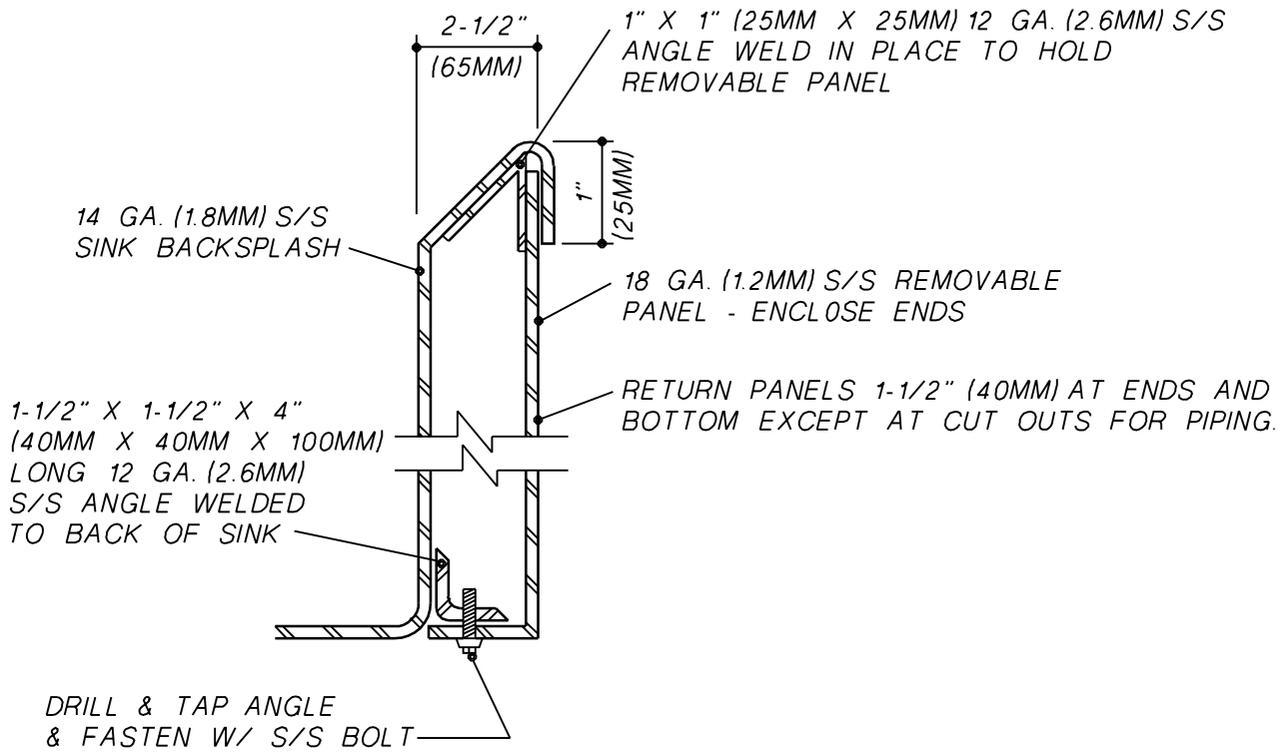

SECTION 1

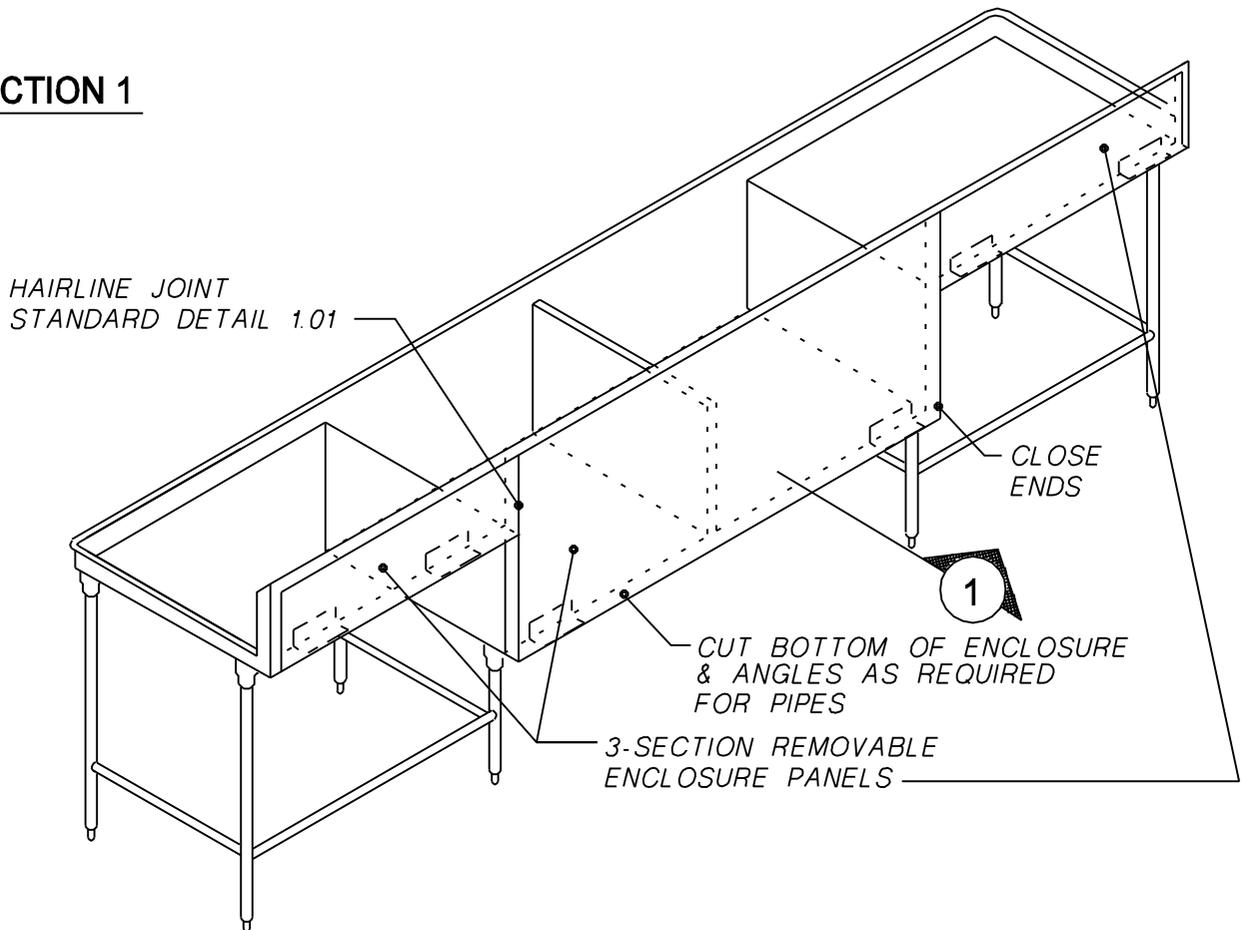

APPROVED: 08-01-01