SHEET KEYNOTES

N002 FINISHED SLAB ELEVATION OF SERVICE YARD IS 1037.75

N003 PW/PCW LINES SHALL BE RUN AT A ELEVATION OF 1048.0. PIPING SHALL PENETRATE THE FOUNDATION WALL AND BE FLANGED APPROXIMATELY 6" INCHES FROM THE INTERIOR FACE OF THE WALL. EXTERIOR PIPING SHALL EXTEND 5 FEET AND BE CAPPED.

N006 EXTERIOR PIPING SHALL EXTEND 5' FEET FROM BUILDING AND BE CAPPED.

N007 PIPES TO BE STUBBED 12" AFF WITH BLIND FLANGE FOR FUTURE CONNECTION.

N008 SUMP BASIN: 30" DIA. X 5'-0" DEEP. THE POLYFIBER BASIN SHALL BE ENCASED IN CONCRETE PIT (50" I.D W/ 6" WIDE WALLS). STEEL BASE PLATES TO BASIN TO PIT.

N009 GREASE INTERCEPTOR: 23"W X 32-1/4"LONG X 53-1/2" DEEP. INLET INVERT AT -2'-10" (1053.69) BELOW FINISHED FLOOR. INTERCEPTOR TO BE ENCASED IN 6" THICK CONCRETE ENCASEMENT PIT. ALLOW 2"+/- GROUT TO SET FLUSH WITH FLOOR.

N010 BACKFLOW PREVENTER SHALL BE OF THE REDUCED PRESSURE TYPE

N011 PROVIDE LOCKABLE BALL VALVE PER SPECIFICATION 15100

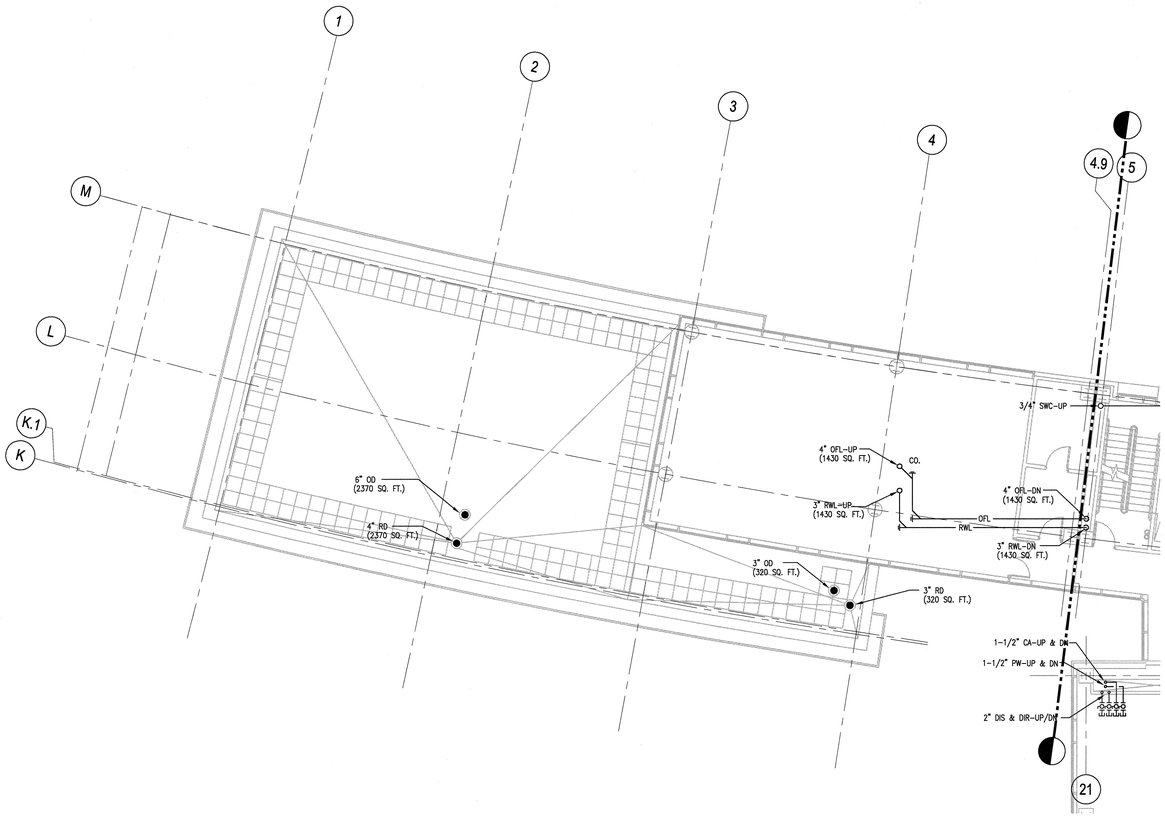



108031400-P8E-8600-A038

Knight/Jacobs Joint Venture
701 Scarboro Road, MS 8253
Oak Ridge, TN 37830
865-241-9433
fax 865-241-3400

KNIGHT
Knight Advanced Technology
540 West Randolph Street
Chicago, IL 60661

UT-BATTELLE
Oak Ridge National Laboratory
managed for the DEPARTMENT OF ENERGY under
U.S. GOVERNMENT contract DE-AC05-00OR22725
UT-BATTELLE, LLC. ▼ Oak Ridge, Tennessee

PROJECT NAME:
SPALLATION NEUTRON SOURCE

CENTRAL LAB AND OFFICE BUILDING PLUMBING FLOOR PLAN LEVEL 3, SECTOR 64

1	48	49	50	PLANT	BLDG	FL	SH.	OF	TYPE	CLASS
3	P	X	X	8	8600		1	1	P	U

51	52	53	WBS		REV
NC	NA		1.8.3.14	P2.03.64	1

DSN	M. WITHROW	05/15/01
DRW	T. WHITE JR.	05/15/01
CHK	B. JOHNSON	05/15/01
DEPT		
PE	C.L. GARREN	9/6/01
PJ	J. STELLERN	08/21/01
REQ		
UTB	J.R. LAWSON	09/25/01

RPE: BRUCE W. JOHNSON, REGISTERED ENGINEER, AGRICULTURE, No. 001895, STATE OF TENNESSEE
REV. 1 DATE 12/20/01

DRAWING APPROVALS

REV	CHANGE TYPE	CHANGE CONTROL SYSTEM	CHANGE REQUEST NUMBER	DESCRIPTION	DSN	CHK	DEPT	DATE	PE	DATE	PJ	DATE	REQ	DATE	UTB	DATE	RPE	RPE NO	DATE	ST	CV	EC	EE	EM	IE	M	PD	SE	AR
1				CERTIFIED FOR CONSTRUCTION - 12/20/01	EB	KJH				12/01		12/01				12/20/01	BWJ	105869	12/20/01	RW	AW	BWJ	PD	BWJ	BWJ	--	BWJ	--	ED
0				CERTIFIED FOR CONSTRUCTION - MAY 15, 2001	EB	KJH			CLG	9/6/01	JS	8/21/01			JRL	9/25/01	BWJ	105869	5/15/01	SC	AW	WRS	RL	WRS	BWJ	--	WRS	--	WAS

REVISION OR ISSUE PURPOSE — REVISION APPROVALS — SQUAD CHECK

NO REPRESENTATION OR WARRANTY, EXPRESSED OR IMPLIED, IS MADE AS TO THE ACCURACY, COMPLETENESS OR USEFULNESS OF THE INFORMATION OR STATEMENTS CONTAINED IN THESE DRAWINGS, OR THAT THE USE OR DISCLOSURE OF ANY INFORMATION, APPARATUS, METHOD, OR PROCESS DISCLOSED IN THESE DRAWINGS MAY NOT INFRINGE PRIVATE RIGHTS OF OTHERS. NO LIABILITY IS ASSUMED WITH RESPECT TO THE USE OF, OR FOR DAMAGES RESULTING FROM THE USE OF ANY INFORMATION, APPARATUS, METHOD, OR PROCESS DISCLOSED IN THESE DRAWINGS. DRAWINGS MADE AVAILABLE FOR INFORMATION TO BIDDER ARE NOT TO BE USED FOR OTHER PURPOSES AND ARE TO BE RETURNED UPON REQUEST OF THE FORWARDING CONTRACTOR.

NUMBER OF SECTION OR DETAIL
DRAWING ON WHICH SECTION OR DETAIL IS SHOWN OR TAKEN
SECTION AND DETAIL KEY

THIS DOCUMENT CONTROLLED BY
CHANGE CONTROL SYSTEM 4
ENGINEERING PROCEDURE SNS-ENG-G001

Date: 12/13/2001 Time: 18:33:01
Username: BOSSERT
DN=P,/AS2/PROJECTS/1000/100_CAD/1KAK_2B1/H3_P1.DT/V3-03-04.DWG

AutoCAD