CONTROL POINT LIST - PROCESS COOLING WATER (PCW) SYSTEM

BUILDING:		OUTPUT FROM DDC						INPUT TO DDC										SOFTWARE: ALARMS						SOFTWARE: APPLICATIONS						
		DIGITAL			ANALOG			DIGITAL					ANALOG					DIGITAL			ANALOG									
POINT DESCRIPTION	GRAPHIC DISPLAY(WINDOWS BASED SOFTWARE)	CONTROL RELAY	HANDS/OFF/AUTO	OPEN/CLOSE	CONTROL POINT ADJUSTMENT	PROPORTIONAL CONTROL		CONTACT CLOSURE	PULSE	DIFFERENTIAL PIPES SWITCH	PRESSURE SWITCH	AUXILIARY CONTACT	GENERAL ALARM	TEMPERATURE (F)	% RELATIVE HUMIDITY	RESISTIVITY	POSITION SENSOR	FLOW	CONTACT CLOSURE--DRY FILTER	CONTACT CLOSURE--EQUIPMENT FAILURE		HIGH LIMIT	LOW LIMIT	RUN TIME		DUTY CYCLING	START/STOP	ECONOMIZER OFF/AUTO	REHEAT COIL RESET	LEAD/LAG	CHILLED WATER RESET	FAILURE MODE
PCW WATER SYSTEMS	X																													
CHILLED WATER RETURN CONTROL VALVE						X																								
PUMP – START/STOP		X																								X				
PUMP – STATUS										X									X				X							
CHILLED WATER SUPPLY TEMPERATURE														X							X	X								

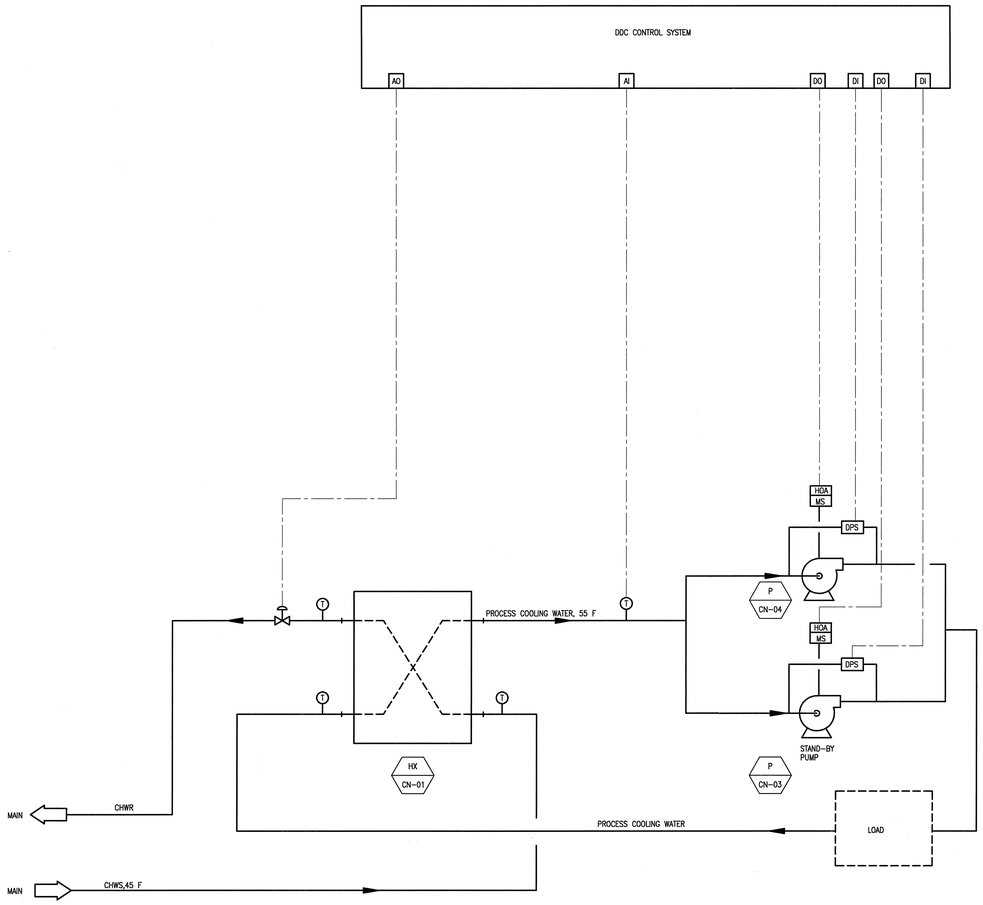

SEQUENCE OF OPERATION

1. GENERAL:
   THE SYSTEM PUMP SHALL BE ENERGIZED THROUGH THE CONTROL SYSTEM AND SHALL RUN CONTINUOUSLY. SHOULD A PUMP FAIL TO START, OR FAIL DURING OPERATION, THE CONTROL SYSTEM SHALL DEENERGIZED THE FAILED PUMP AND SEND A SIGNAL TO ENERGIZE THE STAND-BY PUMP AND INDICATE AN ALARM CONDITION. THE TEMPERATURE SENSOR SHALL PROVIDE MONITORING INPUT TO THE CONTROL SYSTEM.
2. WATER TEMPERATURE:
   A TEMPERATURE SENSOR IN THE PCW WATER SUPPLY LINE SHALL PROVIDE INPUT TO THE CONTROL SYSTEM. THE CONTROL SYSTEM SHALL MODULATE THE CONTROL VALVE IN THE CHILLED WATER RETURN LINE AS REQUIRED TO MAINTAIN THE PCW WATER SUPPLY TEMPERATURE AT 55'F.

PROCESS COOLING WATER CONTROL DIAGRAM

NO SCALE HDG15018-8

CONTROL POINT LIST - SENSIBLE COOLING SYSTEM

BUILDING:		OUTPUT FROM DDC						INPUT TO DDC											SOFTWARE: ALARMS							SOFTWARE: APPLICATIONS						
		DIGITAL			ANALOG			DIGITAL						ANALOG					DIGITAL			ANALOG									
POINT DESCRIPTION	GRAPHIC DISPLAY(WINDOWS BASED SOFTWARE)	CONTROL RELAY	HANDS/OFF/AUTO	START/STOP	CONTROL POINT ADJUSTMENT	PUMP SPEED	PROPORTIONAL CONTROL	CONTACT CLOSURE	PULSE	DIFFERENTIAL PIPES SWITCH	PRESSURE SWITCH	AUXILIARY CONTACT	GENERAL ALARM	TEMPERATURE (F)	% RELATIVE HUMIDITY	PUMP SPEED FEEDBACK	DIFFERENTIAL PRESSURE	FLOW	CONTACT CLOSURE--DRY FILTER	CONTACT CLOSURE--EQUIPMENT FAILURE		HIGH LIMIT	LOW LIMIT	RUN TIME		DUTY CYCLING	START/STOP	ECONOMIZER OFF/AUTO	REHEAT COIL RESET	LEAD/LAG	CHILLED WATER RESET	FAILURE MODE
SENSIBLE COOLING WATER SYSTEMS	X																														
CHILLED WATER RETURN CONTROL VALVE							X																								
P-CN-01 (VFD)				X		X										X															X
P-CN-02 (VFD)				X		X										X															X
DI WATER SUPPLY TEMPERATURE														X								X	X								
DIFFERENTIAL PRESSURE																	X														
DI RESISTIVITY – POLISHING LOOP																X						X	X								

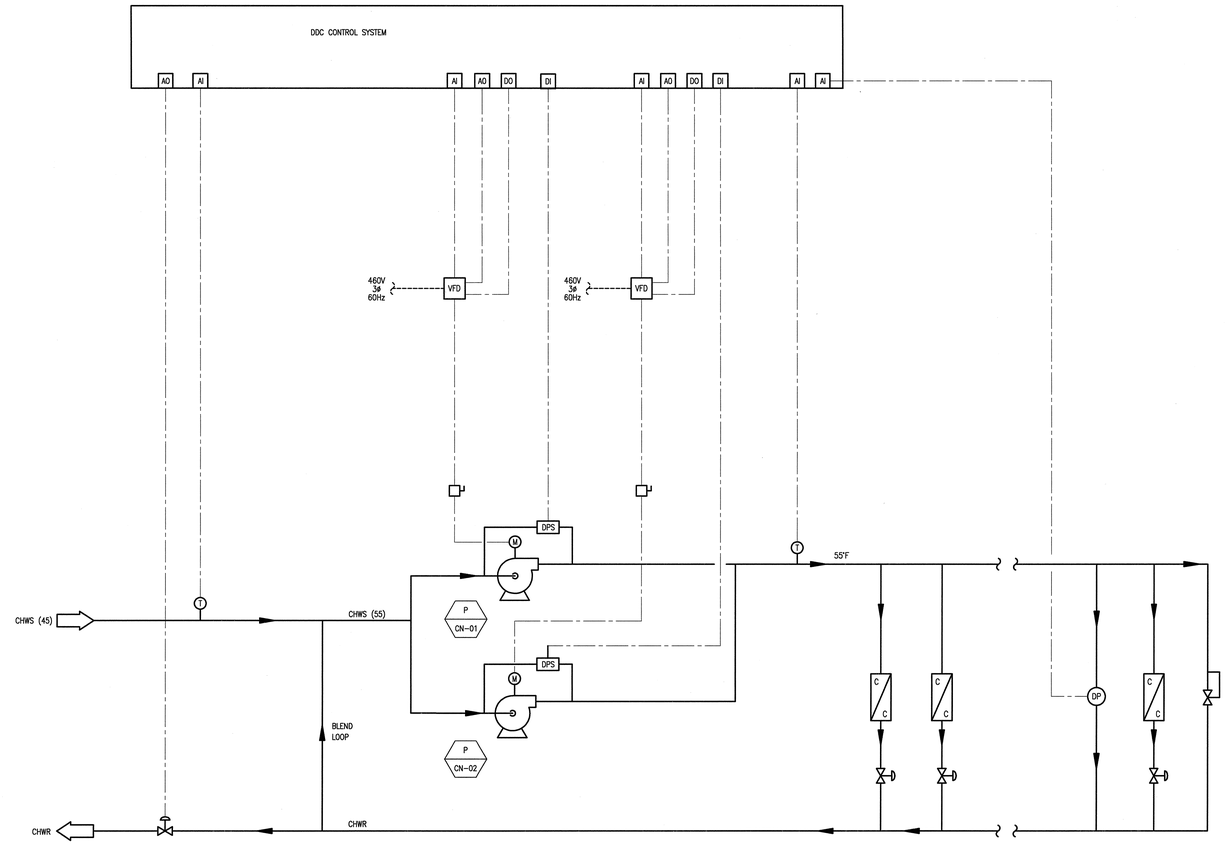

SEQUENCE OF OPERATION

1. GENERAL:
   THE SYSTEM PUMP SHALL BE ENERGIZED THROUGH THE CONTROL SYSTEM AND SHALL RUN CONTINUOUSLY. SHOULD A PUMP FAIL TO START, OR FAIL DURING OPERATION, THE CONTROL SYSTEM SHALL DEENERGIZED THE FAILED PUMP AND SEND A SIGNAL TO ENERGIZE THE STAND-BY PUMP AND INDICATE AN ALARM CONDITION.
2. WATER TEMPERATURE CONTROL:
   A TEMPERATURE SENSOR IN THE CHILLED WATER SUPPLY LINE SHALL PROVIDE INPUT TO THE CONTROL SYSTEM. THE CONTROL SYSTEM SHALL MODULATE THE CONTROL VALVE IN THE CHILLED WATER RETURN LINE AS REQUIRED TO MAINTAIN THE CHILLED WATER SUPPLY TEMPERATURE AT 55'F.
3. FLOW CONTROL:
   A DIFFERENTIAL PRESSURE SWITCH SHALL PROVIDE INPUT TO THE CONTROL SYSTEM. THE CONTROL SYSTEM SHALL MODULATE THE PUMP SPEED AS REQUIRED TO MAINTAIN FLOW.

SENSIBLE COOLING SYSTEM CONTROL DIAGRAM

NO SCALE HDG15018-8

NO REPRESENTATION OR WARRANTY, EXPRESSED OR IMPLIED, IS MADE AS TO THE ACCURACY, COMPLETENESS OR USEFULNESS OF THE INFORMATION OR STATEMENTS CONTAINED IN THESE DRAWINGS, OR THAT THE USE OR DISCLOSURE OF ANY INFORMATION, APPARATUS, METHOD, OR PROCESS DISCLOSED IN THESE DRAWINGS MAY NOT INFRINGE PRIVATE RIGHTS OF OTHERS. NO LIABILITY IS ASSUMED WITH RESPECT TO THE USE OF, OR FOR DAMAGES RESULTING FROM THE USE OF ANY INFORMATION, APPARATUS, METHOD, OR PROCESS DISCLOSED IN THESE DRAWINGS. DRAWINGS MADE AVAILABLE FOR INFORMATION TO BIDDER ARE NOT TO BE USED FOR OTHER PURPOSES AND ARE TO BE RETURNED UPON REQUEST OF THE FORWARDING CONTRACTOR.

NUMBER OF SECTION OR DETAIL
DRAWING ON WHICH SECTION OR DETAIL IS SHOWN OR TAKEN
SECTION AND DETAIL KEY

THIS DOCUMENT CONTROLLED BY
CHANGE CONTROL SYSTEM
ENGINEERING PROCEDURE

REV	CHANGE TYPE	CHANGE CONTROL SYSTEM	CHANGE REQUEST NUMBER	DESCRIPTION	DSN	CHK	DEPT	DATE	PE	DATE	PJ	DATE	REQ	DATE	UTB	DATE	RPE	RPE NO	DATE	ST	CV	EC	EE	EM	IE	M	PD	SE	AR
0				CERTIFIED FOR CONSTRUCTION – 12/9/02	JG	BWJ				1/03		1/03		1/03			BWJ	105869	12/9/02	BZ	AW	BWJ	AK	IM	DM	–	BWJ	–	TW

REVISION OR ISSUE PURPOSE — REVISION APPROVALS — SQUAD CHECK

RPE: BRUCE W. JOHNSON, REGISTERED ENGINEER, CIVIL, NO. 101000, STATE OF TENNESSEE

DSN
DRW
CHK
DEPT
PE CLG 1/24/03
PJ JS 1/24/03
REQ 1/24/03
REV. 0 DATE 12/9/02 UTB JRL
DRAWING APPROVALS

ORNL DRAWING NUMBER:

Knight/Jacobs Joint Venture
701 Scarboro Road, MS 8253
Oak Ridge, TN 37830
865-241-9433
fax 865-241-3400

m+w zander
M+W Zander U.S. Operations, Inc.
549 West Randolph Street
Chicago, IL 60661
Telephone: (312) 577-3200
Fax: (312) 577-3525

UT-BATTELLE
Oak Ridge National Laboratory
managed for the DEPARTMENT OF ENERGY under U.S. GOVERNMENT contract DE-AC05-00OR22725
UT-BATTELLE, LLC. ◆ Oak Ridge, Tennessee

PROJECT NAME:
CENTER FOR NANOPHASE MATERIALS SCIENCES
MISCELLANOUS EQUIPMENT
CONTROL DIAGRAMS-2

1	48	49	50	PLANT	BLDG	FL	SH.	OF	TYPE	CLASS
3	H	X	X	8	8610		1	1	D	U

51	52	53	A/E DRAWING NUMBER:	REV
NC	NA		H8.11.46	0

AutoCAD