



Twister® DB Plus™ Wire Connector

- Smallest wet location/direct burial connector with widest wire range – covers wire sizes from 20 AWG through 12 AWG
- Non-hardening sealant completely seals out moisture to protect conductors from fungus and corrosion – remains stable from -40°C (-40°F) to 105°C (221°F)
- Compact, one-piece design features ribbed cap, swept wings and hexagonal head for easy installation by hand or with standard nutdriver
- Live-action, square-wire spring locks onto wire for safe, secure connections
- Deep skirt provides maximum dielectric strength
- Tough, UL 94V-2 flame-retardant shell rated at 105°C (221°F)
- Certified for underground and wet locations – UL 486D Listed and CSA C22.2 #188.2 Certified; complies with Federal Specifications W-S-610E

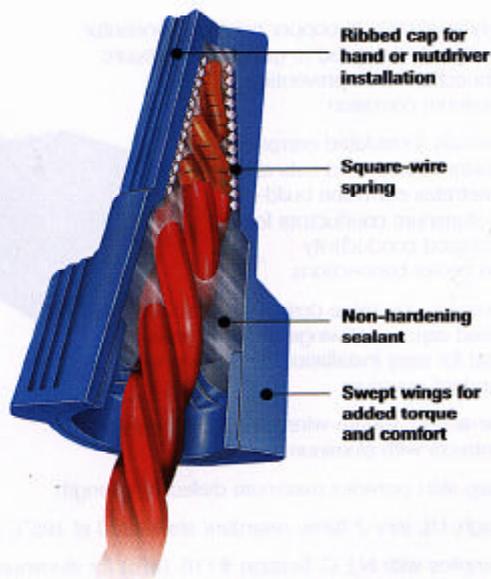

Model	Color	Wire Combination Range	Wire Combination Range (mm)	Quantity	Cat. No.
60	Blue	600V* No. 22 to 8 AWG Min. 1 No. 18 & 1 No. 20 Max. 1 No. 10 & 2 No. 12	600V* .64mm DIA to 3.26mm DIA Min. 1.34mm ² Max. 11.88mm ²	Card of 2	30-060
				Card of 10	30-760
				Card of 25	30-160
				Box of 100	30-260
				Carton of 1,000	30-360

*1,000V maximum in fixtures and signs



Dimensions (Inches mm)


Model	A	B	C	D	E
60	9/32 7	13/32 10.5	55/64 22	7/8 22	1-11/16 43

WARNING:

1. One time use only. Do not reuse.
2. Wiring must comply with all applicable electrical codes.
3. Contact IDEAL for complete wire combination listing.

QuickJaw™ Insulation Displacement Connector

- Fast, easy installation with no twisting or stripping required
- Perfect for ballast retrofit work
- Three-port construction allows connection of up to three wires – fits any combination of 18 through 12 AWG solid and/or stranded wire
- Sturdy, one-piece locking construction – visual and tactile indications confirm closure
- Precision, double-bussed copper alloy contacts for reliable connections
- Ergonomic design reduces wrist fatigue
- Tough, UL 94V-2 flame-retardant shell rated at 105°C (221°F)
- UL 486C Listed and CSA C22.2 #188 Certified; complies with Federal Specification W-S-610E



Description	Cat. No.
Clip Strip – four 20 pc. cards	30-198
Box of 100	30-298
Jar of 300	30-398
Carton of 2,500	30-698

600V maximum building wire; 1,000V signs and fixtures

