## Terminal Strips

- Heavy-duty, corrosion-resistant screws, surface plates and optional hardware
- Accessory hardware provides a variety of termination options
- Available cover helps prevent contact with live terminals
- Rugged thermoplastic base (UL Rated 94V-0)
- Rated at -40°F (-40°C) to 260°F (130°C)
- UL E62622 Listed and CSA LR15364 Certified

### 89-200 Series Terminal Strips
**30A/600V* UL Listed, CSA Certified**

- .562 in. (14.28mm) center spacing
- Accepts wire sizes from 22 through 10 AWG Cu
- #8-32 philslot, zinc-plated steel terminal screws

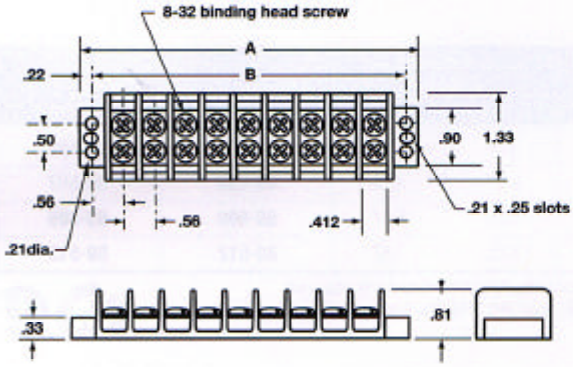


| No. of Poles | Dimensions (Inches) A | Dimensions (Inches) B | Cat. No. |
|---|---|---|---|
| 2 | 2.13 | 1.69 | **89-202** |
| 3 | 2.69 | 2.25 | **89-203** |
| 4 | 3.25 | 2.81 | **89-204** |
| 6 | 4.37 | 3.94 | **89-206** |
| 8 | 5.50 | 5.06 | **89-208** |
| 10 | 6.62 | 6.19 | **89-210** |
| 12 | 7.75 | 7.31 | **89-212** |

*Max. electrical rating 30A/250V when used with optional quick-connects

### 89-300 Series Terminal Strips
**15A/250V** UL Listed, 15A/150V** CSA Certified**

- .375 in. (9.52mm) center spacing
- Accepts wire sizes from 22 through 14 AWG Cu
- #6-32 philslot, zinc-plated steel terminal screws

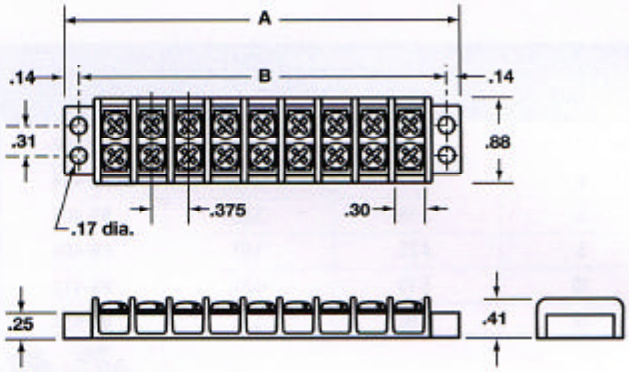


| No. of Poles | Dimensions (Inches) A | Dimensions (Inches) B | Cat. No. |
|---|---|---|---|
| 2 | 1.40 | 1.12 | **89-302** |
| 4 | 2.16 | 1.88 | **89-304** |
| 6 | 2.90 | 2.62 | **89-306** |
| 8 | 3.66 | 3.38 | **89-308** |
| 10 | 4.40 | 4.12 | **89-310** |
| 12 | 5.16 | 4.88 | **89-312** |

**Max. electrical rating 15A/125V when used with optional quick-connects