89-400 Series Terminal Strips
20A/250V UL Listed, CSA Certified

- .437 in. (11.10mm) center spacing
- Accepts wire sizes from 22 through 12 AWG Cu
- #6-32 philslot, zinc-plated steel terminal screws

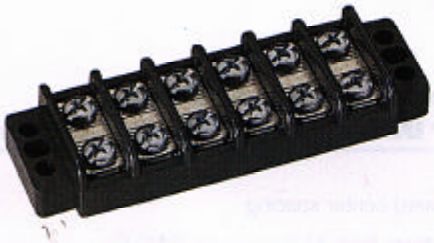

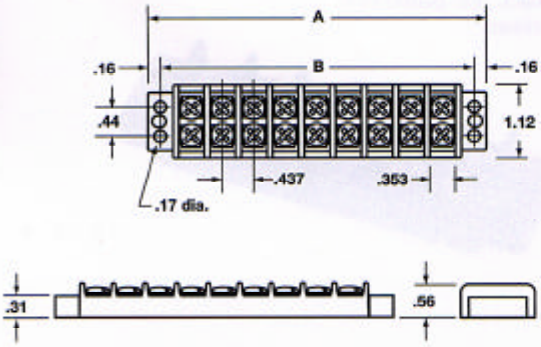

No. of Poles	Dimensions (Inches) A	Dimensions (Inches) B	Cat. No.
2	1.63	1.31	**89-402**
4	2.51	2.18	**89-404**
6	3.38	3.06	**89-406**
8	4.25	3.93	**89-408**
10	5.13	4.81	**89-410**
12	6.00	5.68	**89-412**

89-500 Series Terminal Strips
60A/600V* UL Listed, CSA Certified

- Available shorting-block style
- .625 in. (15.88mm) center spacing
- Accepts wire sizes from 22 through 6 AWG Cu
- #10-32 slotted, nickel plated brass terminal screws

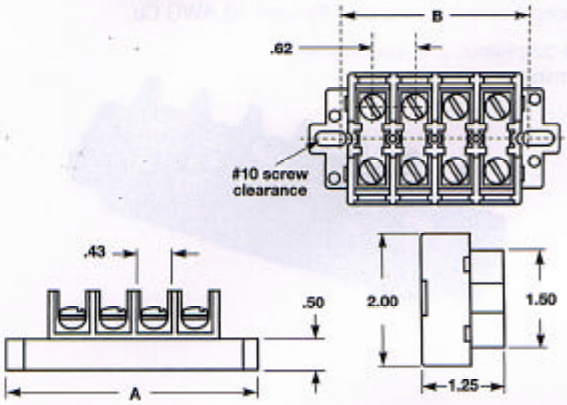

No. of Poles	Dimensions (Inches) A	Dimensions (Inches) B	Standard Block Cat. No.	Shorting Block Cat. No.
4	3.75	2.87	**89-504**	**89-505**
6	5.00	4.12	**89-506**	**89-507**
8	6.25	5.37	**89-508**	**89-509**
12	8.75	7.87	**89-512**	**89-513**

*Max. electrical rating 60A/600V achieved only when used with #6 AWG copper wire crimped to ring terminal