

Rotary Drum Clamp Meter

- 600AAC current capability
- Large, optically clear window
- Pointer lock
- Ohm scale on dial drum
- Range finder symbols
- Safety wrist strap
- Broad frequency response – 50 to 400Hz
- Lifetime limited warranty
Includes carrying case



Description	Cat. No.
Analog Rotary Drum Clamp Meter	61-710

Specifications	61-710		61-711	
	Range & Resolution	Accuracy	Range & Resolution	Accuracy
AC Voltage	150/300/600 V	3.0% F.S.	150/300/600 V	3.0% F.S.
DC Voltage	—	—	60 V	3.0% F.S.
AC Current	6/20/60/200/600 A	3.0% F.S.	6/15/60/150/300 A	3.0% F.S.
Resistance	2k Ω	3.0% F.S.	1k/10k Ω	2.0% F.S.
Temperature	—	—	-4° F to 302° F (-20° C to 150° C) (± 9° F (+/- 5° C))	—



Leakage Current Clamp Meter

- 40mA to 60AAC current capability
- Audible continuity
- Data hold
- Analog bar graph
- Min/max
- Lifetime limited warranty
- CAT III – 600V
Includes carrying case



Description	Cat. No.
Leakage Current Clamp Meter	61-452

Specifications	61-452	
	Range & Resolution	Accuracy
AC Voltage	400.0 V	1.5%
AC Current	40.00/400.0mA/4.000/40.0/60.0 A	2.0%
Resistance	400.0 Ω	1.0%




Flat Scale Clamp Meter

- 300AAC current capability
- Pointer lock
- Temperature measurement
- DC voltage measurement
- Safety wrist strap
- 5-year warranty
Includes carrying case



Description	Cat. No.
Analog Flat Scale Clamp Meter	61-711

Current Clamp Adapters

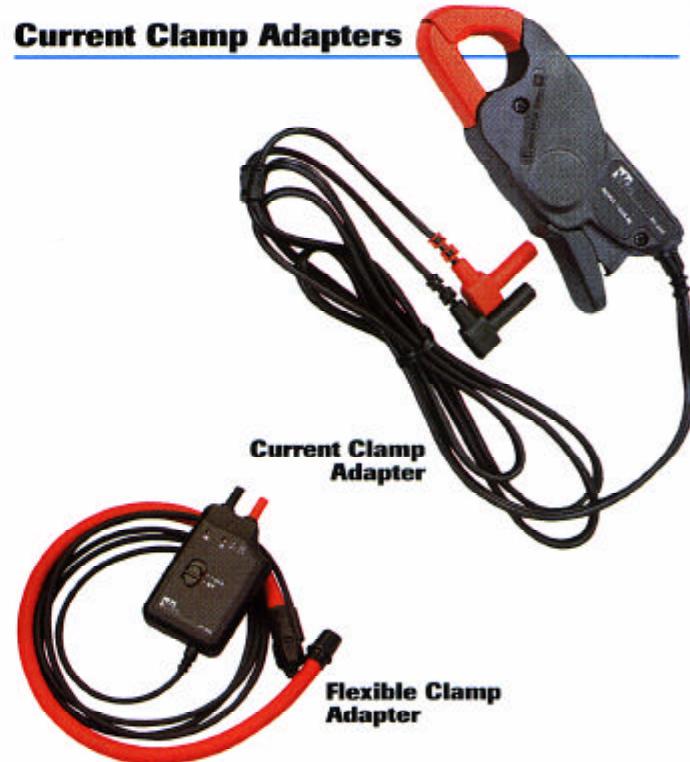

Current Clamp Adapters	Cat. No.
200AAC Current Clamp Adapter	61-332
300AAC Current Clamp Adapter	61-451
500AAC Current Clamp Adapter	61-333
600AAC/DC Current Clamp Adapter	61-334
1000AAC Current Clamp Adapter	61-436
1000AAC Flexible Current Clamp Adapter	61-330
3000AAC Flexible Current Clamp Adapter	61-331