



Catalog Number	
Notes	Type

FEATURES & SPECIFICATIONS

INTENDED USE

- Ideal for applications where accurate color rendition is critical – signs, entry monuments, residential facades and landscaping.

CONSTRUCTION

- Compact, rugged die-cast aluminum housing is ribbed for maximum heat dissipation. TQ has a die-cast aluminum doorframe, TQE lens attaches via tool-less clips. Finish is polyester powder paint for lasting durability.

OPTICAL SYSTEMS

- Anodized aluminum reflector with high efficiency and wide beamspread. Tempered glass lens with high temperature gasketing to inhibit entrance of external contaminants.
- Double-ended quartz lamp included in carton.

INSTALLATION


- Adjustable mounting knuckle with 1/2" NPS threaded stem mounts to standard outlet boxes.

LISTING

- UL/CUL listed suitable for wet locations (25° C maximum ambient temperature).

Floodlighting TQ/TQE

500W QUARTZ




Height: 6.5" (16.51 cm)
Width: 8.875" (22.54 cm)
Depth: 3.5" (8.89 cm)
Weight: 2.07lbs/.93 kg

ORDERING INFORMATION

Example: **TQE 500 120 LPI**

Choose the boldface catalog nomenclature that best suits your needs and write it on the appropriate line. Order accessories as separate catalog numbers (shipped separately).

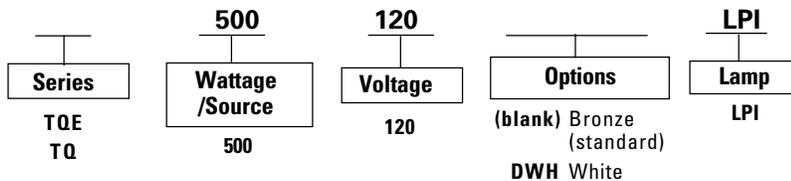

TQ TQE 500 Quartz Floodlighting

TQ TQE 500

©2000 Lithonia Lighting 10/00
TQ TQE 500.P65



ONE LITHONIA WAY, CONYERS, GEORGIA 30012, TELEPHONE 770-922-9000, FAX 770-918-1209
www.lithonia.com • IN CANADA: 1100 50TH AVE., LACHINE, QUEBEC H8T 2V3