



# 500-WATT OPEN REFLECTOR DOWNLIGHT

## FOR 'T-4 TUNGSTEN-HALOGEN' LAMPS

# 217R

SPECIFY VOLTAGE

120V       277V

Type: \_\_\_\_\_ Notes: \_\_\_\_\_

Pre-wired junction box, thermal protection, and 200° C, SF-1 wire standard.

Radial machined aluminum heat sink lowers overall fixture temperature for longer lamp life.

Lampholder:  
Mini-can screw base socket with corrosion resistant, high temperature type contacts.

Housing:  
Cold rolled steel with black baked enamel finish.

Matte white polycarbonate trim ring designed to conceal ceiling cut-out.

7/8" Maximum Ceiling Thickness. Trim collar available for thicker ceilings; consult factory.

Adjustable mounting brackets accept 1 1/2" 'C' channel mounting bars. Indy TRU-LOCK grid ceiling bar hangers are supplied standard. For non-accessible ceilings add suffix '825' for 28" 'C' channel mounting bars.

.050 Aluminum upper reflector.  
Upper reflector finish: Diffused, faceted alzak® standard.  
Faceted reflector construction accommodates variations in the lamp manufacturing tolerances without loss of efficiency or control.

.050 Aluminum deep cone.  
Deep cone finishes: Specular clear alzak® (SAC).  
Other finishes available; see accessories.

Multi-groove baffle (BKB) finish: Matte black.

Shown with 500W, T-4 Frosted Tungsten-Halogen lamp (by others).

Relamping:  
Servicing from above or below ceiling.



Protective heat tempered borosilicate glass lamp shield standard.

Fixture meets requirements for use in non-fire rated ceiling construction.

Extruded aluminum socket housing with 8 heat dissipating Fins allow for operation well within U.L. temperature requirements.

Fixtures are U.L. listed, CSA certified, and I.B.E.W. Union made.

U.L. Listed for damp location and through branch circuit wiring.

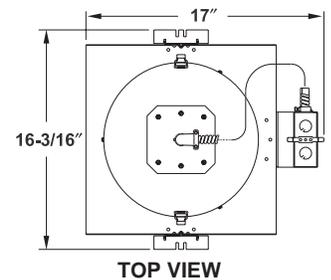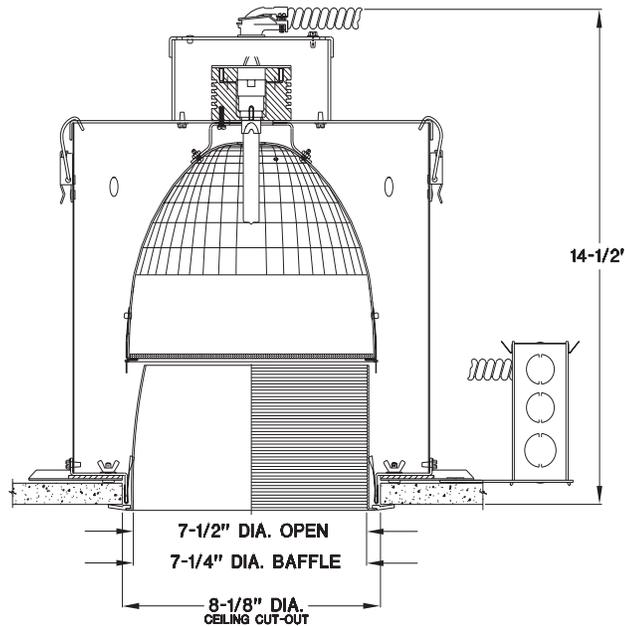

CATALOG NUMBER		BEAM SPREAD	VOLTAGE	WATTAGE & LAMP
SPECULAR CLEAR ALZAK CONE	MATTE BLACK MULTI-GROOVE BAFFLE			
217RN-SAC	217RN-BKB	NARROW	120V	400-500W T-4 FROSTED TUNGSTEN-HALOGEN
217RM-SAC	217RM-BKB	MEDIUM		
217RW-SAC	217RW-BKB	WIDE		

### ACCESSORIES & OPTIONS TO SPECIFY ADD TO CATALOG NUMBER

807W	6' x 3/8" FLEX W/ STRAIGHT CONNECTOR & 3 #18 WIRES	FF	FLAT FLANGE, DEEP CONE ONLY (Same Finish as Cone)
F	FUSE & FUSE HOLDER		
FWR	MODULAR WIRING RECEPTACLE INSTALLATION		
CP	CHICAGO PLENUM APPROVAL (Consult Factory For Availability)		
825	28" 'C' CHANNEL BAR HANGERS, PAIR		
SCA	SLOPED CEILING ADAPTER (5°, 10°, 15°, 20°, 25°, 30°) See Page A-39		
		<b>DEEP CONE FINISHES:</b>	
		CGC	CHAMPAGNE GOLD ALZAK CONE (Replace SAC with CGC)
		SSCC	SEMI-SPECULAR CLEAR ALZAK CONE (Replace SAC with SSCC)
		SSGC	SEMI-SPECULAR CHAMPAGNE GOLD ALZAK CONE (Replace SAC with SSGC)



12001 Exit Five Parkway • Fishers, Indiana 46038 • 317-849-1233 • Fax. 317-576-8006