



INDY 2-CIRCUIT SURFACE MOUNT TRACK

TRACK SERIES

Type: _____ Notes: _____

Shallow, low profile. Only 1/8" higher than INDY single circuit track.

Embossed visual polarity line assures correct electrical installation.


Copper line conductors #12 solid copper.

Extruded aluminum channel.

Extruded Noryl 265 insulator for dimensional and thermal stability.

Connectors plug into the track ends for electrical and mechanical installation.

Mechanical polarity is a standard feature on all track components. Visual polarity helps simplify installation through the embossed polarity line on each track section and indicator arrows present on the track and connectors.

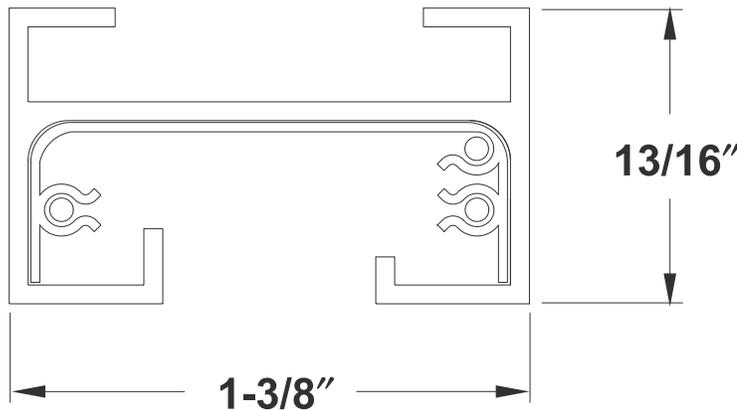

CATALOG NUMBER	FINISH	NOMINAL LENGTH (ACTUAL)
4TU-W	WHITE	4' (43-7/8")
4TU-B	BLACK	4' (43-7/8")
8TU-W	WHITE	8' (91-7/8")
8TU-B	BLACK	8' (91-7/8")
12TU-W	WHITE	12' (139-7/8")
12TU-B	BLACK	12' (139-7/8")

©2001 INDY LIGHTING, INC.

INDY LIGHTING, INC. RESERVES THE RIGHT TO CHANGE DETAILS OF DESIGN, MATERIALS, AND FINISH THAT WILL NOT ALTER THE APPEARANCE OR PERFORMANCE. SUBMISSION APPROVAL: APPROVAL OR REJECTION OF ANY ITEM CONTAINED ON THIS SHEET SHOULD BE CALLED TO THE FACTORY'S ATTENTION WITHIN 30 DAYS AFTER SUBMITTAL, OTHERWISE PRODUCT DELIVERY COULD BE SERIOUSLY AFFECTED.



12001 Exit Five Parkway • Fishers, Indiana 46038 • 317-849-1233 • Fax. 317-576-8006