


Minirail Low-voltage Track, Accessories


Pendant tube: metal, white or black powder-coated.
 Canopy: plastic, white or black.
 Wire rope with mounting bush.
 12 557.023/12 560.023/12 561.023 with rapid connector.
 Ceiling fixture: cast aluminum/metal, white or black powder-coated.
 Max. spacing of suspensions:
 5 ft/1500 mm.

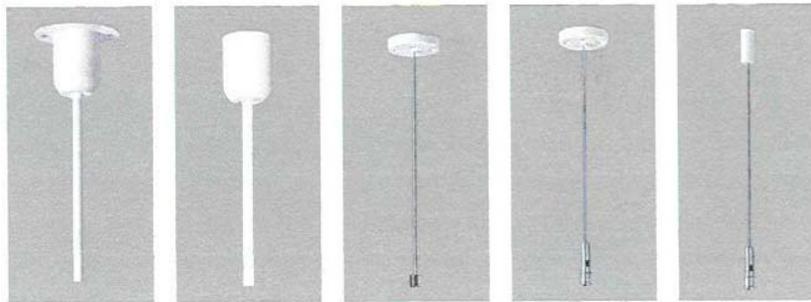


79 944.023 white
 79 945.023 black
 12 446.023 white
 12 445.023 black
 → 12 582.023 ← white
 12 561.023 white
 12 560.023 black
 12 557.023 white

Type SKA
 12 582.023


TYPE SKA
12582.023

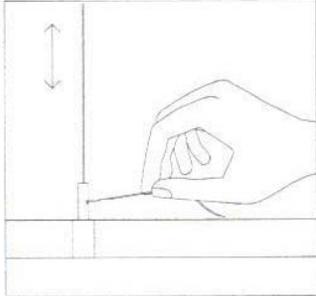


Suspend track installations can be adjusted easily using the rapid connector of 12 557.023/12 560.023/12 561.023

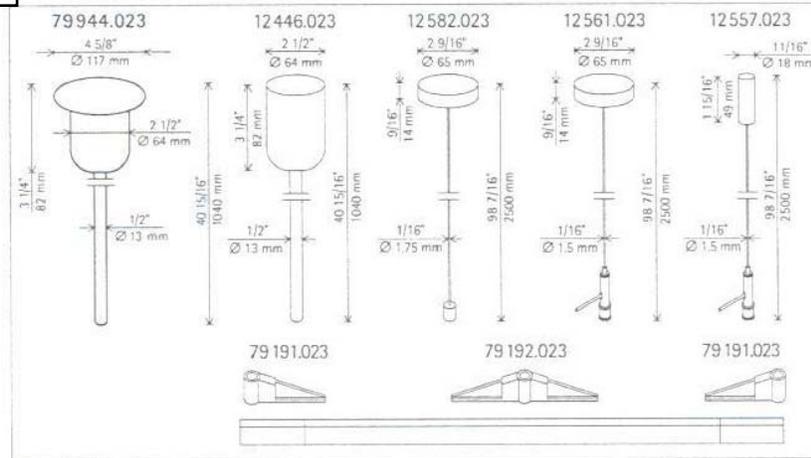


Mounting bushes for suspension of Minirail connectors:
 Cast aluminum, white or black powder-coated.
 Bush for mounting the suspensions.

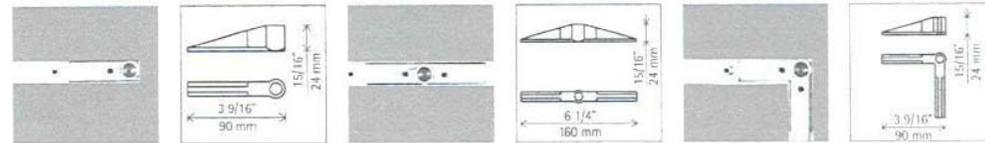

79 191.023 white
 79 194.023 black
 Mounting bush for live end
 79 151.023/79 171.023
 79 192.023 white
 79 195.023 black
 Mounting bush for coupler
 79 153.023/79 173.023
 Also suitable for suspending track
 79 193.023 white
 79 196.023 black
 Mounting bush for L-connector
 79 156.023/79 176.023

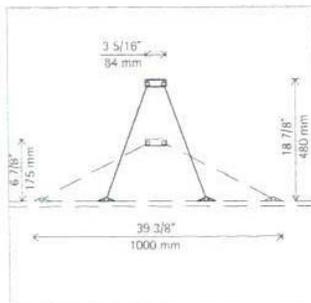

79 190.023
Minirail suspension structure
 Suspension by means of 2 hinged pairs of rods from a ceiling mounting plate: stainless steel. Height adjust: 18 7/8 inch / 480 mm - 6 7/8 inch / 175 mm (can be shortened on site down to 3 9/16 inch / 90 mm). Ceiling fixture and brackets: metal, silver powder-coated, electrical connection not possible. Note: at least 2 suspensions to be used per individual track length. Max. spacing of suspensions: 5 ft/1500 mm.

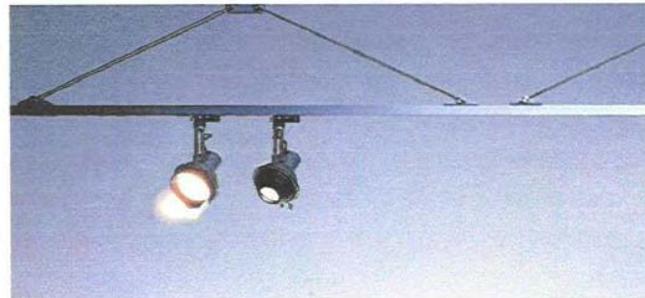

79 184.023 white
 79 183.023 black
Minirail singlet for spotlight
 Recessed mounting 6A.
 Strain relief, Terminal block.
 Housing and mounting ring: plastic, white or black.
 Transformer by others.

