


NOTES


1. LIGHTS ARE SHOWN FOR LOCATION/PLACEMENT ONLY. SEE LANDSCAPE LIGHTING PLANS AND DETAILS FOR ELECTRICAL INFORMATION.
2. SEE RETAINING WALL FOUNDATION PLANS AND DETAILS FOR STRUCTURAL INFORMATION ON WALLS, STAIRS, ETC.
3. PROVIDE MIN 3" DEEPS x 3" WIDE TURNDOWN AT ALL EDGES OF WALKS AND PLAZAS, UNLESS INDICATED OTHERWISE.

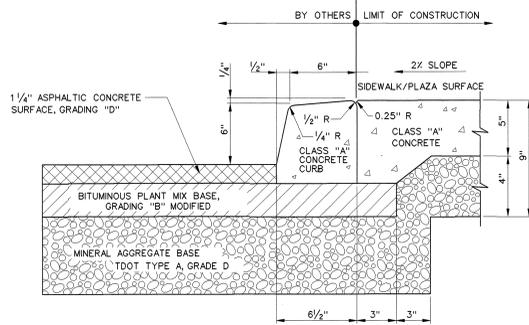

NOTES

1. WHERE THERE IS NO SIDEWALK BACKFILL BEHIND CURB TO FINISHED GRADE WITH TOPSOIL AS DESCRIBED IN GRADING NOTES, DRAWING C0.35.02.
2. INSTALL EXPANSION JOINTS AND CONTROL JOINTS AT LOCATIONS SHOWN ON PLANS.
3. EXACT CURB DIMENSIONS MAY BE ALTERED SLIGHTLY TO FIT STANDARD EXTRUDED CURB MACHINES, BUT SUCH VARIANCES MUST BE APPROVED BY THE CM.


A STANDARD PAVING SECTION NTS



NOTES

1. FINISH SURFACE AS SHOWN ON PLANS AND SPECIFICATIONS.
2. ALL EDGES SHALL BE 1/4" R TOOLED.
3. INSTALL 1/2" EXPANSION JOINTS AT LOCATIONS SHOWN ON PLANS AND SPECIFICATIONS.
4. INSTALL 3/8" TOOLED CONTROL JOINTS AT LOCATIONS SHOWN ON PLANS AND SPECIFICATIONS. CONTROL JOINTS SHALL BE A MINIMUM OF 1" DEEP.


B TYPICAL SECTION FOR CONCRETE WALKS, DRIVES AND PADS NTS

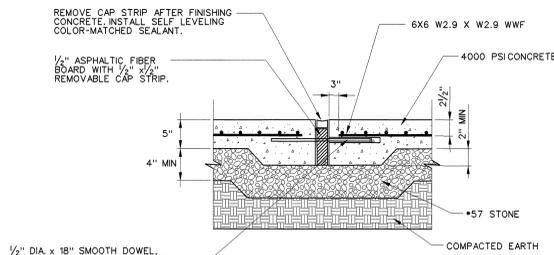


NOTE

1. EXPANSION JOINT TYPICAL FOR ALL CONCRETE WALKS, DRIVES, AND PADS.

C EXPANSION JOINT SECTION NTS

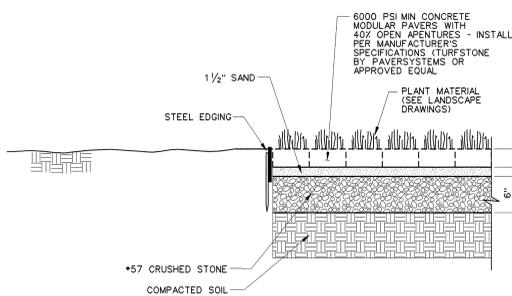

D POROUS PAVING SECTION NTS

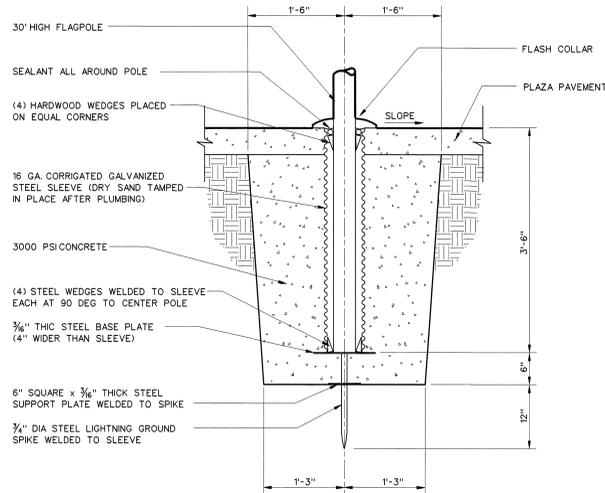

NOTES

1. PAINT PORTION OF FLAGPOLE BELOW GRADE WITH A HEAVY COAT OF BITUMINOUS PAINT.
2. STEEL SLEEVE LENGTH SHALL BE 6" GREATER THAN MANUFACTURER'S STANDARD SLEEVE FOR SPECIFIED POLE HEIGHT TO ALLOW FOR PLAZA PAVEMENT OVER FLAGPOLE FOUNDATION.
3. RECOMMENDED FLAG SIZE IS 5' x 8' (FLAG PROVIDED BY OWNER).

1 FLAG POLE DETAIL NTS

NO REPRESENTATION OR WARRANTY, EXPRESSED OR IMPLIED, IS MADE AS TO THE ACCURACY, COMPLETENESS OR USEFULNESS OF THE INFORMATION OR STATEMENTS CONTAINED IN THESE DRAWINGS, OR THAT THE USE OR DISCLOSURE OF ANY INFORMATION, APPARATUS, METHOD, OR PROCESS DISCLOSED IN THESE DRAWINGS MAY NOT INFRINGE PRIVATE RIGHTS OF OTHERS. NO LIABILITY IS ASSUMED WITH RESPECT TO THE USE OF, OR FOR DAMAGES RESULTING FROM THE USE OF ANY INFORMATION, APPARATUS, METHOD, OR PROCESS DISCLOSED IN THESE DRAWINGS. DRAWINGS MADE AVAILABLE FOR INFORMATION TO BIDDER ARE NOT TO BE USED FOR OTHER PURPOSES AND ARE TO BE RETURNED UPON REQUEST OF THE FORWARDING CONTRACTOR.

THIS DOCUMENT CONTROLLED BY CHANGE CONTROL SYSTEM 4 ENGINEERING PROCEDURE SNS-ENG-0001

SECTION AND DETAIL KEY

REV	DATE	DESCRIPTION	DSN	CHK	DEPT	DATE	PE	DATE	PJ	DATE	REQ	DATE	UTB	DATE	RPE	RPE NO	DATE	ST	CV	EC	EE	EM	IE	M	PD	SE	AR
0		CERTIFIED FOR CONSTRUCTION - 5/15/2001	JP	SF		10/11/01	JP	4/19/05	19									SC	AW	BS	RL	BS	BJ	--	BS	--	WS

RPE

DSGN J. PFEIFER 05/15/01
 DRW K. LYNCH 05/15/01
 CHKR S. FRITTS 05/15/01

DEPT
 SECT
 PE [Signature] 07/14/01
 PJ [Signature] 07/14/01
 REQ

REV 0 DATE 5/15/01 UTB [Signature] [Signature]

DRAWING APPROVALS

108031400-C8E-8600-A013

Knight Jacobs
 Knight Jacobs Joint Venture
 701 Scarborough Road, MS 8253
 Oak Ridge, TN 37830
 865-241-9433
 fax 865-241-3400

BWSC
 BARRY WADSWORTH
 BILLY R. [Signature]
 CHANDON, INDIAN
 ENGINEERS ARCHITECTS PLANNERS
 LANDSCAPE ARCHITECTS AND SURVEYORS
 1000 W. 10th St., Suite 200
 Terre Haute, IN 47787

Oak Ridge National Laboratory
 managed for the DEPARTMENT OF ENERGY under
 U.S. GOVERNMENT contract DE-AC05-00OR22725
 UT-BATTELLE, LLC, Oak Ridge, Tennessee

PROJECT NAME
 SPALLATION NEUTRON SOURCE

CENTRAL LAB AND OFFICE BUILDING
 SITE SECTIONS AND DETAILS

1	48	49	50	PLANT	BLDG	FL	SH.	OF	TYPE	CLASS
3	C	X	X	8	8600	X	1	1	S	U
51	52	53	WBS							
NC	NA	IN	1.8.3.14							

DRAWING NUMBER
 C2.35.01

REV 0